

# *Machinery's Handbook, 31st Edition*

## **ERRATA (Errors Found Since First Printing)**

Updated September 2021

### CONTENTS OF THIS ERRATA FILE

(Scroll or page down through this pdf file to review these marked up pages.)

| <b>Pages</b> | <b>Corrections</b>            |
|--------------|-------------------------------|
| 2            | Contents page number          |
| 157          | Page reference number         |
| 375          | Page reference number (added) |
| 423-426      | Table subtitle                |
| 551          | Material spelling             |
| 573          | Table information             |
| 652          | Figure revised                |
| 1014         | Table information             |
| 1022         | Figure label                  |
| 1304         | Figure label                  |
| 1307         | Figure label                  |
| 1674         | Table information             |
| 1688         | Table information             |
| 2018         | Figure adjustment             |
| 2023         | Equation correction           |
| 2067         | Table information             |
| 2542-2543    | Table information; footnote   |
| 2834         | Decimal in equation           |

Note: The following corrected pages from are provided to inform individual customers who have purchased the *Machinery's Handbook, 31st Edition* of errors and corrections to be applied in future editions. These pages may not be reproduced or transmitted in any form or by any means without prior written permission from the publisher. Please refer to the printed or digital book for the stated Limits of Liability and Disclaimer of Warranty, which applies to all pages herein. © 2021, Industrial Press, Inc. All rights reserved.

# TABLE OF CONTENTS

## MATHEMATICS

| TRIGONOMETRY:         |                                                          |
|-----------------------|----------------------------------------------------------|
| SOLUTION OF TRIANGLES |                                                          |
| 94                    | Terminology                                              |
| 94                    | Degree and Radian Angle Measure                          |
| 94                    | Trigonometric Ratios of Essential Angles                 |
| 95                    | Functions of Angles                                      |
| 95                    | Right Triangle Ratios                                    |
| 96                    | Law of Sines                                             |
| 96                    | Law of Cosines                                           |
| 96                    | Trigonometric Identities                                 |
| 98                    | Solution of Right Triangles                              |
| 99                    | Solution and Examples of Right Triangles                 |
| 100                   | Solution and Examples of Oblique Triangles               |
| 102                   | Rapid Solution of Triangles                              |
| 103                   | Conversion Tables of Angular Measure                     |
| 105                   | Trigonometric Functions                                  |
| 106                   | Trigonometry Tables                                      |
| 111                   | Using a Calculator to Find Trigonometric Function Values |
| 111                   | Versed Sine and Cosine                                   |
| 111                   | Sevolute Functions                                       |
| 111                   | Involute Functions                                       |
| 116                   | Spherical Trigonometry                                   |
| 116                   | Right-Angle Spherical Trigonometry                       |
| 118                   | Oblique Spherical Trigonometry                           |
| 120                   | Compound Angles                                          |
| 122                   | Interpolation                                            |
| MATRICES              |                                                          |
| 124                   | Matrix Operations                                        |
| 124                   | Addition and Subtraction                                 |
| 124                   | Multiplication                                           |
| 125                   | Transpose                                                |
| 125                   | Determinant of a Square Matrix                           |
| 125                   | Minors and Cofactors                                     |
| 126                   | Adjoint of a Matrix                                      |
| 126                   | Singularity and Rank                                     |
| 126                   | Inverse                                                  |
| 127                   | Solving a System of Equations                            |

| CALCULUS                                   |                                                 |
|--------------------------------------------|-------------------------------------------------|
| 130                                        | Derivatives                                     |
| 130                                        | Formulas                                        |
| 131                                        | Rules                                           |
| 131                                        | Integrals (Antiderivatives)                     |
| 132                                        | Integral Rules                                  |
| 132                                        | Newton's Method for Solving Equations           |
| 133                                        | Formulas for Differential and Integral Calculus |
| 135                                        | Series Representation of a Function             |
| STATISTICAL ANALYSIS OF MANUFACTURING DATA |                                                 |
| 136                                        | Statistics Theory in Brief                      |
| 136                                        | Probability                                     |
| 137                                        | Normal Distribution Analysis                    |
| 139                                        | Applying Statistics                             |
| 139                                        | Minimum Number of Points                        |
| 139                                        | Comparing b to Average                          |
| ENGINEERING ECONOMICS                      |                                                 |
| 143                                        | Interest                                        |
| 143                                        | Variables                                       |
| 144                                        | Simple Interest                                 |
| 144                                        | Compound Interest                               |
| 144                                        | Determining Principal, Rate, or Time            |
| 145                                        | Nominal versus Effective Interest Rates         |
| 146                                        | Cash Flow and Equivalence                       |
| 146                                        | Present Value and Discount                      |
| 146                                        | Annuities                                       |
| 147                                        | Sinking Funds                                   |
| 147                                        | Cash Flow Diagrams                              |
| 149                                        | Depreciation                                    |
| 149                                        | Straight Line                                   |
| 149                                        | Sum of the Years Digits                         |
| 149                                        | Double Declining Balance                        |
| 149                                        | Statutory Depreciation                          |
| 150                                        | Evaluating Alternative Investments              |
| 150                                        | Net Present Value                               |
| 151                                        | Capitalized Cost                                |
| 152                                        | Equivalent Uniform Annual Cost                  |
| 153                                        | Rate of Return                                  |
| 153                                        | Benefit-Cost Ratio                              |
| 153                                        | Payback Period                                  |

Page number for "Simple Interest" corrected to page 144 (was incorrectly page 143).

*Acceleration* is the time-rate of change of velocity and is expressed as velocity divided by time or as distance divided by time squared, that is, in feet per second per second or feet per second squared ( $\text{ft/sec}^2$ ); inches per second per second or inches per second squared ( $\text{in/sec}^2$ ); centimeters per second per second or centimeters per second squared ( $\text{cm/sec}^2$ ); etc. **The metric SI unit is the meter per second squared ( $\text{m/sec}^2$ ).**

**Unit Abbreviations.**—Standard abbreviations for the units of physical quantities are used throughout the Handbook. Comprehensive tables of unit abbreviations are found starting on page 2827 for US units, and on page 2832 for metric units.

**Unit Systems.**—In mechanics calculations, both *absolute* and *gravitational* systems of units are employed. The fundamental quantities in absolute systems are *length*, *time*, and *mass*, and from these the dimension of *force* is derived. Two absolute systems that have been in use for many years are the CGS (centimeter-gram-second) and the MKS (meter-kilogram-second) systems. They are named for the fundamental units of length, mass and time, respectively. Another system known as MKSA (meter-kilogram-second-ampere) links the MKS system of units of mechanics with electromagnetic units.

**The General Conference of Weights and Measures (CGPM), which is the body responsible for all international matters concerning the metric system, adopted in 1954 a rationalized and coherent system of units based on the four MKSA units, including the kelvin as the unit of temperature and the candela as the unit of luminous intensity. In 1960, the CGPM formally named this system the “Système International d’Unités,” for which the abbreviation is SI in all languages. In 1971, the 14th CGPM adopted a seventh base unit, the *mole*, which is the unit of quantity (“amount of substance”). Further details of the SI are given in the section *MEASURING UNITS* starting on page 2831, and its application in mechanics calculations, contrasted with the use of the English system, is considered below.**

The fundamental quantities in gravitational systems are *length*, *time*, and *force*, and from these units, the dimension of *mass* is derived. In the gravitational system most widely used in English measure countries, the units of length, time, and force are, respectively, the foot (ft), the second (s or sec), and the pound (lb). The corresponding unit of mass, commonly called the *slug*, is equal to  $1 \text{ lb-s}^2/\text{ft}$  and is derived from the formula,  $M = W/g$  in which  $M$  = mass in slugs,  $W$  = weight in pounds, and  $g$  = acceleration due to gravity, commonly taken as  $32.16 \text{ ft/s}^2$ . A body that weighs 32.16 lbs on the surface of the earth has, therefore, a mass of 1 slug.

Many engineering calculations utilize a system of units consisting of the inch, the second, and the pound. The corresponding units of mass are pounds second squared per inch ( $\text{lb-s}^2/\text{in}$ ) and the value of  $g$  is taken as  $386 \text{ in/s}^2$ .

In a gravitational system that has been widely used in metric countries, the units of length, time, and force are, respectively, the meter, the second, and the kilogram-force ( $1 \text{ kgf} = 9.80665 \text{ N}$ ). The corresponding units of mass are  $\text{kgf-s}^2/\text{m}$  and the value of  $g$  is taken as  $9.81 \text{ m/s}^2$ .

**Acceleration of Gravity  $g$  Used in Mechanics Formulas.**—The acceleration of a freely falling body varies according to location on the earth’s surface as well as the height from which the body falls. Its value measured at sea level at the equator is  $32.09 \text{ ft/sec}^2$  while at the poles is  $32.26 \text{ ft/sec}^2$ . In the United States it is customary to regard 32.16 as satisfactory for most practical purposes in engineering calculations.

**Standard Pound Force:** For use in defining the magnitude of a standard unit of force, known as the *pound force*, a fixed value of  $32.1740 \text{ ft/sec}^2$ , designated by the symbol  $g_0$ , has been adopted by international agreement. As a result of this agreement, whenever the term mass,  $M$ , appears in a mechanics formula and the substitution  $M = W/g$  is made, use of the standard value  $g_0 = 32.1740 \text{ ft/sec}^2$  is implied, although as stated previously, it is customary to use approximate values for  $g$  except where extreme accuracy is required.

Subtitle in parentheses of this table (MH31 pages 423-426) changed (from incorrect subtitle "Hot Rolled, Normalized, and Annealed")

## MECHANICAL PROPERTIES OF STEELS

423

**Table 11b. Typical Mechanical Properties of Selected Carbon and Alloy Steels (Quenched-and-Tempered Condition)**

| AISI<br>No. <sup>a</sup> | Tempering<br>Temperature,<br>°F | Tensile Strength        |       | Elongation,<br>Percent | Reduction<br>in Area,<br>Percent | Hardness,<br>BHN |
|--------------------------|---------------------------------|-------------------------|-------|------------------------|----------------------------------|------------------|
|                          |                                 | Ultimate                | Yield |                        |                                  |                  |
|                          |                                 | 1000 lb/in <sup>2</sup> |       |                        |                                  |                  |
| 1030 <sup>b</sup>        | 400                             | 123                     | 94    | 17                     | 47                               | 495              |
|                          | 600                             | 116                     | 90    | 19                     | 53                               | 401              |
|                          | 800                             | 106                     | 84    | 23                     | 60                               | 302              |
|                          | 1000                            | 97                      | 75    | 28                     | 65                               | 255              |
|                          | 1200                            | 85                      | 64    | 32                     | 70                               | 207              |
| 1040 <sup>b</sup>        | 400                             | 130                     | 96    | 16                     | 45                               | 514              |
|                          | 600                             | 129                     | 94    | 18                     | 52                               | 444              |
|                          | 800                             | 122                     | 92    | 21                     | 57                               | 352              |
|                          | 1000                            | 113                     | 86    | 23                     | 61                               | 269              |
|                          | 1200                            | 97                      | 72    | 28                     | 68                               | 201              |
| 1040                     | 400                             | 113                     | 86    | 19                     | 48                               | 262              |
|                          | 600                             | 113                     | 86    | 20                     | 53                               | 255              |
|                          | 800                             | 110                     | 80    | 21                     | 54                               | 241              |
|                          | 1000                            | 104                     | 71    | 26                     | 57                               | 212              |
|                          | 1200                            | 92                      | 63    | 29                     | 65                               | 192              |
| 1050 <sup>b</sup>        | 400                             | 163                     | 117   | 9                      | 27                               | 514              |
|                          | 600                             | 158                     | 115   | 13                     | 36                               | 444              |
|                          | 800                             | 145                     | 110   | 19                     | 48                               | 375              |
|                          | 1000                            | 125                     | 95    | 23                     | 58                               | 293              |
|                          | 1200                            | 104                     | 78    | 28                     | 65                               | 235              |
| 1050                     | 400                             | ...                     | ...   | ...                    | ...                              | ...              |
|                          | 600                             | 142                     | 105   | 14                     | 47                               | 321              |
|                          | 800                             | 136                     | 95    | 20                     | 50                               | 277              |
|                          | 1000                            | 127                     | 84    | 23                     | 53                               | 262              |
|                          | 1200                            | 107                     | 68    | 29                     | 60                               | 223              |
| 1060                     | 400                             | 160                     | 113   | 13                     | 40                               | 321              |
|                          | 600                             | 160                     | 113   | 13                     | 40                               | 321              |
|                          | 800                             | 156                     | 111   | 14                     | 41                               | 311              |
|                          | 1000                            | 140                     | 97    | 17                     | 45                               | 277              |
|                          | 1200                            | 116                     | 76    | 23                     | 54                               | 229              |
| 1080                     | 400                             | 190                     | 142   | 12                     | 35                               | 388              |
|                          | 600                             | 189                     | 142   | 12                     | 35                               | 388              |
|                          | 800                             | 187                     | 138   | 13                     | 36                               | 375              |
|                          | 1000                            | 164                     | 117   | 16                     | 40                               | 321              |
|                          | 1200                            | 129                     | 87    | 21                     | 50                               | 255              |
| 1095 <sup>b</sup>        | 400                             | 216                     | 152   | 10                     | 31                               | 601              |
|                          | 600                             | 212                     | 150   | 11                     | 33                               | 534              |
|                          | 800                             | 199                     | 139   | 13                     | 35                               | 388              |
|                          | 1000                            | 165                     | 110   | 15                     | 40                               | 293              |
|                          | 1200                            | 122                     | 85    | 20                     | 47                               | 235              |
| 1095                     | 400                             | 187                     | 120   | 10                     | 30                               | 401              |
|                          | 600                             | 183                     | 118   | 10                     | 30                               | 375              |
|                          | 800                             | 176                     | 112   | 12                     | 32                               | 363              |
|                          | 1000                            | 158                     | 98    | 15                     | 37                               | 321              |
|                          | 1200                            | 130                     | 80    | 21                     | 47                               | 269              |
| 1137                     | 400                             | 157                     | 136   | 5                      | 22                               | 352              |
|                          | 600                             | 143                     | 122   | 10                     | 33                               | 285              |
|                          | 800                             | 127                     | 106   | 15                     | 48                               | 262              |
|                          | 1000                            | 110                     | 88    | 24                     | 62                               | 229              |
|                          | 1200                            | 95                      | 70    | 28                     | 69                               | 197              |

**Table 11b. (Continued) Typical Mechanical Properties of Selected Carbon and Alloy Steels (Quenched-and-Tempered Condition)**

| AISI No. <sup>a</sup> | Tempering Temperature, °F | Tensile Strength        |       | Elongation, Percent | Reduction in Area, Percent | Hardness, BHN |
|-----------------------|---------------------------|-------------------------|-------|---------------------|----------------------------|---------------|
|                       |                           | Ultimate                | Yield |                     |                            |               |
|                       |                           | 1000 lb/in <sup>2</sup> |       |                     |                            |               |
| 1137 <sup>b</sup>     | 400                       | 217                     | 169   | 5                   | 17                         | 415           |
|                       | 600                       | 199                     | 163   | 9                   | 25                         | 375           |
|                       | 800                       | 160                     | 143   | 14                  | 40                         | 311           |
|                       | 1000                      | 120                     | 105   | 19                  | 60                         | 262           |
|                       | 1200                      | 94                      | 77    | 25                  | 69                         | 187           |
| 1141                  | 400                       | 237                     | 176   | 6                   | 17                         | 461           |
|                       | 600                       | 212                     | 186   | 9                   | 32                         | 415           |
|                       | 800                       | 169                     | 150   | 12                  | 47                         | 331           |
|                       | 1000                      | 130                     | 111   | 18                  | 57                         | 262           |
|                       | 1200                      | 103                     | 86    | 23                  | 62                         | 217           |
| 1144                  | 400                       | 127                     | 91    | 17                  | 36                         | 277           |
|                       | 600                       | 126                     | 90    | 17                  | 40                         | 262           |
|                       | 800                       | 123                     | 88    | 18                  | 42                         | 248           |
|                       | 1000                      | 117                     | 83    | 20                  | 46                         | 235           |
|                       | 1200                      | 105                     | 73    | 23                  | 55                         | 217           |
| 1330 <sup>b</sup>     | 400                       | 232                     | 211   | 9                   | 39                         | 459           |
|                       | 600                       | 207                     | 186   | 9                   | 44                         | 402           |
|                       | 800                       | 168                     | 150   | 15                  | 53                         | 335           |
|                       | 1000                      | 127                     | 112   | 18                  | 60                         | 263           |
|                       | 1200                      | 106                     | 83    | 23                  | 63                         | 216           |
| 1340                  | 400                       | 262                     | 231   | 11                  | 35                         | 505           |
|                       | 600                       | 230                     | 206   | 12                  | 43                         | 453           |
|                       | 800                       | 183                     | 167   | 14                  | 51                         | 375           |
|                       | 1000                      | 140                     | 120   | 17                  | 58                         | 295           |
|                       | 1200                      | 116                     | 90    | 22                  | 66                         | 252           |
| 4037                  | 400                       | 149                     | 110   | 6                   | 38                         | 310           |
|                       | 600                       | 138                     | 111   | 14                  | 53                         | 295           |
|                       | 800                       | 127                     | 106   | 20                  | 60                         | 270           |
|                       | 1000                      | 115                     | 95    | 23                  | 63                         | 247           |
|                       | 1200                      | 101                     | 61    | 29                  | 60                         | 220           |
| 4042                  | 400                       | 261                     | 241   | 12                  | 37                         | 516           |
|                       | 600                       | 234                     | 211   | 13                  | 42                         | 455           |
|                       | 800                       | 187                     | 170   | 15                  | 51                         | 380           |
|                       | 1000                      | 143                     | 128   | 20                  | 59                         | 300           |
|                       | 1200                      | 115                     | 100   | 28                  | 66                         | 238           |
| 4130 <sup>b</sup>     | 400                       | 236                     | 212   | 10                  | 41                         | 467           |
|                       | 600                       | 217                     | 200   | 11                  | 43                         | 435           |
|                       | 800                       | 186                     | 173   | 13                  | 49                         | 380           |
|                       | 1000                      | 150                     | 132   | 17                  | 57                         | 315           |
|                       | 1200                      | 118                     | 102   | 22                  | 64                         | 245           |
| 4140                  | 400                       | 257                     | 238   | 8                   | 38                         | 510           |
|                       | 600                       | 225                     | 208   | 9                   | 43                         | 445           |
|                       | 800                       | 181                     | 165   | 13                  | 49                         | 370           |
|                       | 1000                      | 138                     | 121   | 18                  | 58                         | 285           |
|                       | 1200                      | 110                     | 95    | 22                  | 63                         | 230           |
| 4150                  | 400                       | 280                     | 250   | 10                  | 39                         | 530           |
|                       | 600                       | 256                     | 231   | 10                  | 40                         | 495           |
|                       | 800                       | 220                     | 200   | 12                  | 45                         | 440           |
|                       | 1000                      | 175                     | 160   | 15                  | 52                         | 370           |
|                       | 1200                      | 139                     | 122   | 19                  | 60                         | 290           |
| 4340                  | 400                       | 272                     | 243   | 10                  | 38                         | 520           |
|                       | 600                       | 250                     | 230   | 10                  | 40                         | 486           |
|                       | 800                       | 213                     | 198   | 10                  | 44                         | 430           |
|                       | 1000                      | 170                     | 156   | 13                  | 51                         | 360           |
|                       | 1200                      | 140                     | 124   | 19                  | 60                         | 280           |

# MECHANICAL PROPERTIES OF STEELS

425

**Table 11b. (Continued) Typical Mechanical Properties of Selected Carbon and Alloy Steels (Quenched-and-Tempered Condition)**

| AISI<br>No. <sup>a</sup> | Tempering<br>Temperature,<br>°F | Tensile Strength        |       | Elongation,<br>Percent | Reduction<br>in Area,<br>Percent | Hardness,<br>BHN |
|--------------------------|---------------------------------|-------------------------|-------|------------------------|----------------------------------|------------------|
|                          |                                 | Ultimate                | Yield |                        |                                  |                  |
|                          |                                 | 1000 lb/in <sup>2</sup> |       |                        |                                  |                  |
| 5046                     | 400                             | 253                     | 204   | 9                      | 25                               | 482              |
|                          | 600                             | 205                     | 168   | 10                     | 37                               | 401              |
|                          | 800                             | 165                     | 135   | 13                     | 50                               | 336              |
|                          | 1000                            | 136                     | 111   | 18                     | 61                               | 282              |
|                          | 1200                            | 114                     | 95    | 24                     | 66                               | 235              |
| 50B46                    | 400                             | ...                     | ...   | ...                    | ...                              | 560              |
|                          | 600                             | 258                     | 235   | 10                     | 37                               | 505              |
|                          | 800                             | 202                     | 181   | 13                     | 47                               | 405              |
|                          | 1000                            | 157                     | 142   | 17                     | 51                               | 322              |
|                          | 1200                            | 128                     | 115   | 22                     | 60                               | 273              |
| 50B60                    | 400                             | ...                     | ...   | ...                    | ...                              | 600              |
|                          | 600                             | 273                     | 257   | 8                      | 32                               | 525              |
|                          | 800                             | 219                     | 201   | 11                     | 34                               | 435              |
|                          | 1000                            | 163                     | 145   | 15                     | 38                               | 350              |
|                          | 1200                            | 130                     | 113   | 19                     | 50                               | 290              |
| 5130                     | 400                             | 234                     | 220   | 10                     | 40                               | 475              |
|                          | 600                             | 217                     | 204   | 10                     | 46                               | 440              |
|                          | 800                             | 185                     | 175   | 12                     | 51                               | 379              |
|                          | 1000                            | 150                     | 136   | 15                     | 56                               | 305              |
|                          | 1200                            | 115                     | 100   | 20                     | 63                               | 245              |
| 5140                     | 400                             | 260                     | 238   | 9                      | 38                               | 490              |
|                          | 600                             | 229                     | 210   | 10                     | 43                               | 450              |
|                          | 800                             | 190                     | 170   | 13                     | 50                               | 365              |
|                          | 1000                            | 145                     | 125   | 17                     | 58                               | 280              |
|                          | 1200                            | 110                     | 96    | 25                     | 66                               | 235              |
| 5150                     | 400                             | 282                     | 251   | 5                      | 37                               | 525              |
|                          | 600                             | 252                     | 230   | 6                      | 40                               | 475              |
|                          | 800                             | 210                     | 190   | 9                      | 47                               | 410              |
|                          | 1000                            | 163                     | 150   | 15                     | 54                               | 340              |
|                          | 1200                            | 117                     | 118   | 20                     | 60                               | 270              |
| 5160                     | 400                             | 322                     | 260   | 4                      | 10                               | 627              |
|                          | 600                             | 290                     | 257   | 9                      | 30                               | 555              |
|                          | 800                             | 233                     | 212   | 10                     | 37                               | 461              |
|                          | 1000                            | 169                     | 151   | 12                     | 47                               | 341              |
|                          | 1200                            | 130                     | 116   | 20                     | 56                               | 269              |
| 51B60                    | 400                             | ...                     | ...   | ...                    | ...                              | 600              |
|                          | 600                             | ...                     | ...   | ...                    | ...                              | 540              |
|                          | 800                             | 237                     | 216   | 11                     | 36                               | 460              |
|                          | 1000                            | 175                     | 160   | 15                     | 44                               | 355              |
|                          | 1200                            | 140                     | 126   | 20                     | 47                               | 290              |
| 6150                     | 400                             | 280                     | 245   | 8                      | 38                               | 538              |
|                          | 600                             | 250                     | 228   | 8                      | 39                               | 483              |
|                          | 800                             | 208                     | 193   | 10                     | 43                               | 420              |
|                          | 1000                            | 168                     | 155   | 13                     | 50                               | 345              |
|                          | 1200                            | 137                     | 122   | 17                     | 58                               | 282              |
| 81B45                    | 400                             | 295                     | 250   | 10                     | 33                               | 550              |
|                          | 600                             | 256                     | 228   | 8                      | 42                               | 475              |
|                          | 800                             | 204                     | 190   | 11                     | 48                               | 405              |
|                          | 1000                            | 160                     | 149   | 16                     | 53                               | 338              |
|                          | 1200                            | 130                     | 115   | 20                     | 55                               | 280              |

**Table 11b.** *(Continued)* **Typical Mechanical Properties of Selected Carbon and Alloy Steels (Quenched-and-Tempered Condition)**

| AISI No. <sup>a</sup> | Tempering Temperature, °F | Tensile Strength        |       | Elongation, Percent | Reduction in Area, Percent | Hardness, BHN |
|-----------------------|---------------------------|-------------------------|-------|---------------------|----------------------------|---------------|
|                       |                           | Ultimate                | Yield |                     |                            |               |
|                       |                           | 1000 lb/in <sup>2</sup> |       |                     |                            |               |
| 8630                  | 400                       | 238                     | 218   | 9                   | 38                         | 465           |
|                       | 600                       | 215                     | 202   | 10                  | 42                         | 430           |
|                       | 800                       | 185                     | 170   | 13                  | 47                         | 375           |
|                       | 1000                      | 150                     | 130   | 17                  | 54                         | 310           |
|                       | 1200                      | 112                     | 100   | 23                  | 63                         | 240           |
| 8640                  | 400                       | 270                     | 242   | 10                  | 40                         | 505           |
|                       | 600                       | 240                     | 220   | 10                  | 41                         | 460           |
|                       | 800                       | 200                     | 188   | 12                  | 45                         | 400           |
|                       | 1000                      | 160                     | 150   | 16                  | 54                         | 340           |
|                       | 1200                      | 130                     | 116   | 20                  | 62                         | 280           |
| 86B45                 | 400                       | 287                     | 238   | 9                   | 31                         | 525           |
|                       | 600                       | 246                     | 225   | 9                   | 40                         | 475           |
|                       | 800                       | 200                     | 191   | 11                  | 41                         | 395           |
|                       | 1000                      | 160                     | 150   | 15                  | 49                         | 335           |
|                       | 1200                      | 131                     | 127   | 19                  | 58                         | 280           |
| 8650                  | 400                       | 281                     | 243   | 10                  | 38                         | 525           |
|                       | 600                       | 250                     | 225   | 10                  | 40                         | 490           |
|                       | 800                       | 210                     | 192   | 12                  | 45                         | 420           |
|                       | 1000                      | 170                     | 153   | 15                  | 51                         | 340           |
|                       | 1200                      | 140                     | 120   | 20                  | 58                         | 280           |
| 8660                  | 400                       | ...                     | ...   | ...                 | ...                        | 580           |
|                       | 600                       | ...                     | ...   | ...                 | ...                        | 535           |
|                       | 800                       | 237                     | 225   | 13                  | 37                         | 460           |
|                       | 1000                      | 190                     | 176   | 17                  | 46                         | 370           |
|                       | 1200                      | 155                     | 138   | 20                  | 53                         | 315           |
| 8740                  | 400                       | 290                     | 240   | 10                  | 41                         | 578           |
|                       | 600                       | 249                     | 225   | 11                  | 46                         | 495           |
|                       | 800                       | 208                     | 197   | 13                  | 50                         | 415           |
|                       | 1000                      | 175                     | 165   | 15                  | 55                         | 363           |
|                       | 1200                      | 143                     | 131   | 20                  | 60                         | 302           |
| 9255                  | 400                       | 305                     | 297   | 1                   | 3                          | 601           |
|                       | 600                       | 281                     | 260   | 4                   | 10                         | 578           |
|                       | 800                       | 233                     | 216   | 8                   | 22                         | 477           |
|                       | 1000                      | 182                     | 160   | 15                  | 32                         | 352           |
|                       | 1200                      | 144                     | 118   | 20                  | 42                         | 285           |
| 9260                  | 400                       | ...                     | ...   | ...                 | ...                        | 600           |
|                       | 600                       | ...                     | ...   | ...                 | ...                        | 540           |
|                       | 800                       | 255                     | 218   | 8                   | 24                         | 470           |
|                       | 1000                      | 192                     | 164   | 12                  | 30                         | 390           |
|                       | 1200                      | 142                     | 118   | 20                  | 43                         | 295           |
| 94B30                 | 400                       | 250                     | 225   | 12                  | 46                         | 475           |
|                       | 600                       | 232                     | 206   | 12                  | 49                         | 445           |
|                       | 800                       | 195                     | 175   | 13                  | 57                         | 382           |
|                       | 1000                      | 145                     | 135   | 16                  | 65                         | 307           |
|                       | 1200                      | 120                     | 105   | 21                  | 69                         | 250           |

<sup>a</sup> All grades are fine-grained except those in the 1100 series that are coarse-grained. Austenitizing temperatures are given in parentheses. Heat-treated specimens were oil-quenched unless otherwise indicated.

<sup>b</sup> Water quenched.

Source: Bethlehem Steel Corp. and Republic Steel Corp. as published in 1974 DATABOOK issue of the American Society for Metals' *Metal Progress* magazine and used with permission.

To develop a series of reference half-cell and samples of the target metals are immersed together in an electrolyte solution chosen and circulated to match the expected environmental conditions. Over time, potentials of the target metals are measured relative to the reference half-cell. There are several standard reference half-cell compositions that will yield different values; the appropriate reference is compatible with the electrolyte. A useful standard is ASTM G82-98 (2014), “Standard Guide for Development and Use of a Galvanic Series for Predicting Galvanic Corrosion Performance.”

For examples of seawater applications, refer to Table 2, which is based on Army Missile Command Report RS-TR-67-11, "Practical Galvanic Series." Materials closer together along the arrow in the series have less corrosion-inducing potential difference between them in that environment. However, use this data with caution in predicting whether corrosion will be a risk. This series indicates which material will be the anode in a couple, though polarity reversals can occur in which a metal normally anodic to another will become cathodic to that same metal. Examples include high-temperature reversals of zinc/iron, aluminum/iron, and aluminum/zinc.

Name corrected  
(was "Silicone  
Bronze 655" so  
"e" removed)

*Noble (Cathodic)*

Table 2a. Typical Mechanical Properties of Common Plastics (Inch)

| Material     | Yield Stress, ksi |        |         | Elastic Modulus, ksi |         |         | Heat Deflection Temperature, °F |        |         | Izod Impact Strength, ft lb/in |        |         |
|--------------|-------------------|--------|---------|----------------------|---------|---------|---------------------------------|--------|---------|--------------------------------|--------|---------|
|              | Minimum           | Median | Maximum | Minimum              | Median  | Maximum | Minimum                         | Median | Maximum | Minimum                        | Median | Maximum |
| ABS          | 2.9               | 6.3    | 10.7    | 112.8                | 333.5   | 884.5   | 149                             | 192    | 244     | 0.19                           | 4.12   | 1.2     |
| PC           | 5.8               | 9.1    | 22.3    | 261                  | 346.55  | 870     | 172                             | 261    | 369     | 0.84                           | 16.7   | 37.4    |
| PEEK         | 9.425             | 14.1   | 16.7    | 319                  | 568.4   | 939.6   | 284                             | 316    | 500     | 0.39                           | 1.09   | 3.18    |
| PET          | 0.3045            | 5.6    | 13.1    | 130.5                | 456.75  | 754     | 140                             | 159    | 239     | 0.26                           | 1.12   | 1.55    |
| PP           | 1.2992            | 3.6    | 5.1     | 108.8                | 195.75  | 507.5   | 100                             | 135    | 239     | 0.5                            | 4.02   | 13.5    |
| PP, GF       | 3.625             | 8.7    | 13.1    | 149.4                | 609     | 949.75  | 140                             | 268    | 374     | 0.26                           | 1.8    | 8.42    |
| PE, HD       | 1.102             | 3.1    | 6.2     | 65.3                 | 134.415 | 217.5   | 100                             | 118    | 187     | 0.36                           | 1.44   | 37.4    |
| PE, LD       | 1.1165            | 1.6    | 9.4     | 16                   | 33.64   | 65.105  | 100                             | 153    | 214     | 4.49                           | 8.42   | 37.4    |
| PMMA         | 3.625             | 9.3    | 12.3    | 137.8                | 420.5   | 549.55  | 125                             | 193    | 223     | 0.22                           | 0.56   | 2.75    |
| PSU          | 6.96              | 12.8   | 26.8    | 249.4                | 817.8   | 2798.5  | 175                             | 352    | 500     | 0.5                            | 1.42   | 7.86    |
| PVC          | 0.21315           | 2.4    | 8.6     | 0.2                  | 313.2   | 469.8   | 116                             | 159    | 189     | 0.39                           | 11.6   | 37.4    |
| TS Phenolic  | 5.945             | 7.7    | 8.4     | 594.5                | 1015    | 1252.8  | 320                             | 349    | 439     | 0.39                           | 0.51   | 0.6     |
| TS Epoxy     | 0.10005           | 3.3    | 12.3    | 14.5                 | 359.6   | 870     | 149                             | 295    | 649     | 0.36                           | 0.67   | 1.29    |
| TS Epoxy, GF | 12.035            | 16.5   | 7.5     | 435                  | 2088    | 2755    | 329                             | 439    | 536     | 0.3                            | 0.54   | 0.69    |
| TS Polyester | 1.45              | 7.5    | 17.8    | 145                  | 584.35  | 1537    | 392                             | 486    | 500     | 2.3                            | 7.49   | 17      |
| TS Polyimide | 10.585            | 18.6   | 23.2    | 159.5                | 569.85  | 1566    | 356                             | 707    | 752     | 0.39                           | 0.66   | 0.8     |

Table 2b. Typical Mechanical Properties of Common Plastics (Metric)


| Material     | Yield Stress, MPa |        |         | Elastic Modulus, GPa |        |         | Heat Deflection Temperature, °C |        |         | Izod Impact Strength, J/cm |        |         |
|--------------|-------------------|--------|---------|----------------------|--------|---------|---------------------------------|--------|---------|----------------------------|--------|---------|
|              | Minimum           | Median | Maximum | Minimum              | Median | Maximum | Minimum                         | Median | Maximum | Minimum                    | Median | Maximum |
| ABS          | 20                | 43.4   | 75.5    | 0.778                | 2.3    | 6.1     | 65                              | 88.9   | 118     | 0.1                        | 2.2    | 6.4     |
| PC           | 40                | 62.7   | 154     | 1.8                  | 2.59   | 6       | 77.8                            | 127    | 187     | 0.45                       | 8.92   | 20      |
| PEEK         | 65                | 97.4   | 115     | 2.2                  | 3.92   | 6.48    | 140                             | 158    | 260     | 0.21                       | 0.58   | 1.7     |
| PET          | 2.1               | 38.8   | 90      | 0.9                  | 3.15   | 5.2     | 60                              | 70.3   | 115     | 0.139                      | 0.6    | 0.83    |
| PP           | 8.96              | 25     | 35.2    | 0.75                 | 1.35   | 3.5     | 37.8                            | 57     | 115     | 0.267                      | 2.15   | 7.2     |
| PP, GF       | 25                | 60     | 90      | 1.03                 | 4.2    | 6.55    | 60                              | 131    | 190     | 0.14                       | 0.96   | 4.5     |
| PE, HD       | 7.6               | 21.3   | 43      | 0.45                 | 0.927  | 1.5     | 37.6                            | 47.5   | 86.1    | 0.19                       | 0.77   | 20      |
| PE, LD       | 7.7               | 10.8   | 64.8    | 0.11                 | 0.232  | 0.449   | 38                              | 67.4   | 101     | 2.4                        | 4.5    | 20      |
| PMMA         | 25                | 64     | 85      | 0.95                 | 2.9    | 3.79    | 79.4                            | 178    | 260     | 0.267                      | 0.76   | 4.2     |
| PVC          | 48                | 88.1   | 185     | 1.72                 | 5.64   | 19.3    | 324                             | 70.8   | 87.2    | 0.21                       | 6.2    | 20      |
| TS Phenolic  | 1.47              | 16.4   | 59      | 0.0016               | 7      | 8.64    | 46.7                            | 176    | 226     | 0.21                       | 0.32   | 0.32    |
| TS Epoxy     | 0.69              | 53.2   | 57.9    | 4.1                  | 2.48   | 6       | 65                              | 146    | 343     | 0.19                       | 0.36   | 0.69    |
| TS Epoxy, GF | 83                | 114    | 150     | 3                    | 14.4   | 19      | 165                             | 226    | 280     | 0.16                       | 0.29   | 0.4     |
| TS Polyester | 10                | 51.8   | 123     | 1                    | 4.03   | 10.6    | 200                             | 252    | 260     | 1.23                       | 4      | 9.08    |
| TS Polyimide | 73                | 128    | 160     | 1.1                  | 3.93   | 10.8    | 180                             | 375    | 400     | 0.21                       | 0.35   | 0.43    |

Statistical summary of available grades submitted by material suppliers (data courtesy of MatWeb.com).

The limits for hole and shaft as given in Table 8a to Table 12 are increased for clearance fits (*decreased* for transition or interference fits) by the value of the upper shaft limit, that is, by the amount required to change the maximum shaft to the basic size.

**Graphical Representation of ANSI/ASME Standard Limits and Fits**

*ANSI/ASME B4.1-1967 (2009; out of print)*

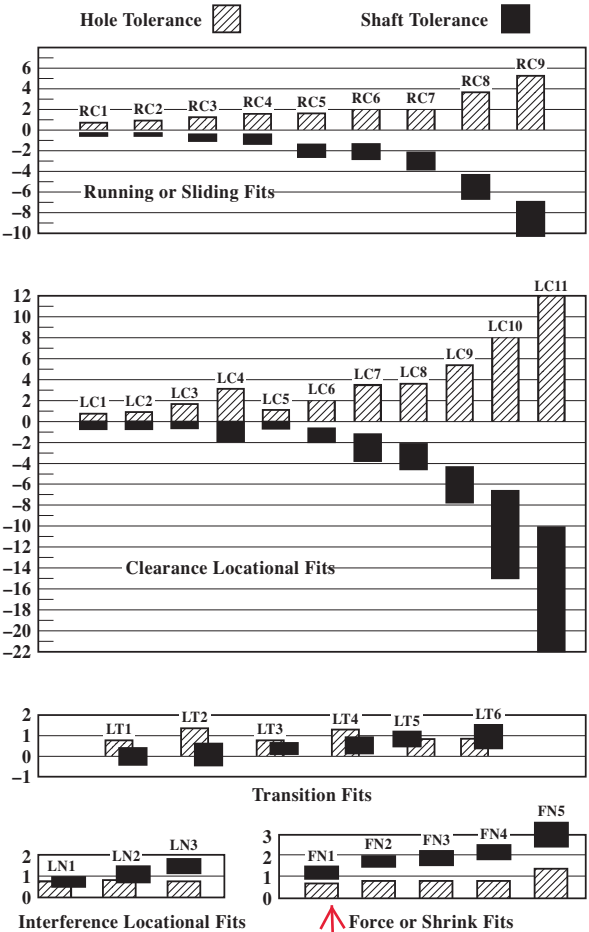

Diagrams show disposition of hole and shaft tolerances (in thousandths of an inch) with respect to basic size (0) for a diameter of 1 inch.

This figure has been revised per the ANSI/ASME standard.

Table 1a. Morse Stub Taper Shanks

| No. of Taper | Taper per Foot <sup>a</sup>    | Taper per Inch <sup>b</sup>     | Small End of Plug, <sup>b</sup> D | Dia. End of Socket, <sup>a</sup> A | Shank                           |                                 | Tang                           |                                |
|--------------|--------------------------------|---------------------------------|-----------------------------------|------------------------------------|---------------------------------|---------------------------------|--------------------------------|--------------------------------|
|              |                                |                                 |                                   |                                    | Total Length, B                 | Depth, C                        | Thickness, E                   | Length, F                      |
| 1            | 0.59858                        | 0.049882                        | 0.4314                            | 0.475                              | 1 <sup>5</sup> / <sub>16</sub>  | 1 <sup>1</sup> / <sub>8</sub>   | 1 <sup>3</sup> / <sub>64</sub> | 5 <sup>1</sup> / <sub>16</sub> |
| 2            | 0.59941                        | 0.049951                        | 0.6469                            | 0.700                              | 1 <sup>11</sup> / <sub>16</sub> | 1 <sup>7</sup> / <sub>16</sub>  | 1 <sup>9</sup> / <sub>64</sub> | 7 <sup>1</sup> / <sub>16</sub> |
| 3            | 0.60235                        | 0.050196                        | 0.8753                            | 0.938                              | 2                               | 1 <sup>3</sup> / <sub>4</sub>   | 2 <sup>5</sup> / <sub>64</sub> | 9 <sup>1</sup> / <sub>16</sub> |
| 4            | 0.62326                        | 0.051938                        | 1.1563                            | 1.231                              | 2 <sup>3</sup> / <sub>8</sub>   | 2 <sup>1</sup> / <sub>16</sub>  | 3 <sup>3</sup> / <sub>64</sub> | 1 <sup>1</sup> / <sub>16</sub> |
| 5            | 0.63151                        | 0.052626                        | 1.6526                            | 1.748                              | 3                               | 2 <sup>11</sup> / <sub>16</sub> | 3 <sup>4</sup> / <sub>64</sub> | 1 <sup>5</sup> / <sub>16</sub> |
| No. of Taper | Tang                           |                                 | Socket                            |                                    |                                 | Tang Slot                       |                                |                                |
|              | Radius of Mill, G              | Diameter, H                     | Plug Depth, P                     | Min. Depth of Tapered Hole         |                                 | Socket End to Tang Slot, M      | Width, N                       | Length, O                      |
|              |                                |                                 |                                   | Drilled X                          | Reamed Y                        |                                 |                                |                                |
| 1            | 3 <sup>1</sup> / <sub>16</sub> | 1 <sup>13</sup> / <sub>32</sub> | 7 <sup>1</sup> / <sub>8</sub>     | 1 <sup>5</sup> / <sub>16</sub>     | 2 <sup>9</sup> / <sub>32</sub>  | 2 <sup>5</sup> / <sub>32</sub>  | 7 <sup>1</sup> / <sub>32</sub> | 2 <sup>3</sup> / <sub>32</sub> |
| 2            | 7 <sup>1</sup> / <sub>32</sub> | 3 <sup>9</sup> / <sub>64</sub>  | 1 <sup>1</sup> / <sub>16</sub>    | 1 <sup>5</sup> / <sub>32</sub>     | 1 <sup>7</sup> / <sub>64</sub>  | 1 <sup>5</sup> / <sub>16</sub>  | 5 <sup>1</sup> / <sub>16</sub> | 1 <sup>5</sup> / <sub>16</sub> |
| 3            | 9 <sup>1</sup> / <sub>32</sub> | 1 <sup>3</sup> / <sub>16</sub>  | 1 <sup>1</sup> / <sub>4</sub>     | 1 <sup>3</sup> / <sub>8</sub>      | 1 <sup>5</sup> / <sub>16</sub>  | 1 <sup>1</sup> / <sub>16</sub>  | 1 <sup>3</sup> / <sub>32</sub> | 1 <sup>1</sup> / <sub>8</sub>  |
| 4            | 3 <sup>1</sup> / <sub>8</sub>  | 1 <sup>3</sup> / <sub>32</sub>  | 1 <sup>7</sup> / <sub>16</sub>    | 1 <sup>9</sup> / <sub>16</sub>     | 1 <sup>1</sup> / <sub>2</sub>   | 1 <sup>3</sup> / <sub>16</sub>  | 1 <sup>7</sup> / <sub>32</sub> | 1 <sup>3</sup> / <sub>8</sub>  |
| 5            | 9 <sup>1</sup> / <sub>16</sub> | 1 <sup>9</sup> / <sub>32</sub>  | 1 <sup>13</sup> / <sub>16</sub>   | 1 <sup>15</sup> / <sub>16</sub>    | 1 <sup>7</sup> / <sub>8</sub>   | 1 <sup>7</sup> / <sub>16</sub>  | 2 <sup>5</sup> / <sub>32</sub> | 1 <sup>3</sup> / <sub>4</sub>  |

All dimensions in inches.  
Radius J is 3/64, 1/16, 3/64, 1/32, and 1/8 inch respectively for Nos. 1, 2, 3, 4, and 5 tapers.

<sup>a</sup> These are basic dimensions.

<sup>b</sup> These dimensions are calculated for reference only.

Corrected to 15/16  
(was incorrectly 5/16)

**Jarno Taper.**—The Jarno taper was originally proposed by Oscar J. Beale of the Brown & Sharpe Mfg. Co. This taper is based on such simple formulas that practically no calculations are required when the number of taper is known. The taper per foot of all Jarno taper sizes is 0.600 inch on the diameter. The diameter at the large end is as many eighths, the diameter at the small end is as many tenths, and the length as many half inches as are indicated by the number of the taper. For example, a No. 7 Jarno taper is 7<sup>1</sup>/<sub>8</sub> inch in diameter at the large end; 7<sup>1</sup>/<sub>10</sub>, or 0.700 inch at the small end; and 7<sup>1</sup>/<sub>2</sub>, or 3<sup>1</sup>/<sub>2</sub> inches long; hence, diameter at large end = No. of taper ÷ 8; diameter at small end = No. of taper ÷ 10; length of taper = No. of taper ÷ 2. The Jarno taper is used on various machine tools, especially profiling machines and die-sinking machines. It has also been used for the headstock and tailstock spindles of some lathes.

Letter in figure corrected to **H**  
(was incorrectly **B**).

**Table 8. Dimensions of Morse Taper Sleeves**

A = No. Morse Taper Outside

B = No. Morse Taper Inside

| A | B | C                               | D     | E                             | F                              | G                             | H                              | I     | K                               | L                              | M     |
|---|---|---------------------------------|-------|-------------------------------|--------------------------------|-------------------------------|--------------------------------|-------|---------------------------------|--------------------------------|-------|
| 2 | 1 | 3 <sup>3</sup> / <sub>16</sub>  | 0.700 | 5/8                           | 1/4                            | 3/16                          | 2 <sup>3</sup> / <sub>16</sub> | 0.475 | 2 <sup>1</sup> / <sub>16</sub>  | 3/4                            | 0.213 |
| 3 | 1 | 3 <sup>15</sup> / <sub>16</sub> | 0.938 | 1/4                           | 3/16                           | 9/16                          | 2 <sup>3</sup> / <sub>16</sub> | 0.475 | 2 <sup>1</sup> / <sub>16</sub>  | 3/4                            | 0.213 |
| 3 | 2 | 4 <sup>1</sup> / <sub>16</sub>  | 0.938 | 3/4                           | 3/16                           | 9/16                          | 2 <sup>3</sup> / <sub>16</sub> | 0.700 | 2 <sup>1</sup> / <sub>16</sub>  | 7/8                            | 0.260 |
| 4 | 1 | 4 <sup>7</sup> / <sub>8</sub>   | 1.231 | 1/4                           | 1 <sup>5</sup> / <sub>32</sub> | 5/8                           | 2 <sup>3</sup> / <sub>16</sub> | 0.475 | 2 <sup>1</sup> / <sub>16</sub>  | 3/4                            | 0.213 |
| 4 | 2 | 4 <sup>7</sup> / <sub>8</sub>   | 1.231 | 1/4                           | 1 <sup>5</sup> / <sub>32</sub> | 5/8                           | 2 <sup>3</sup> / <sub>16</sub> | 0.700 | 2 <sup>1</sup> / <sub>16</sub>  | 7/8                            | 0.260 |
| 4 | 3 | 5 <sup>3</sup> / <sub>8</sub>   | 1.231 | 3/4                           | 1 <sup>5</sup> / <sub>32</sub> | 5/8                           | 3 <sup>1</sup> / <sub>4</sub>  | 0.938 | 3 <sup>1</sup> / <sub>16</sub>  | 1 <sup>3</sup> / <sub>16</sub> | 0.322 |
| 5 | 1 | 6 <sup>1</sup> / <sub>16</sub>  | 1.748 | 1/4                           | 5/8                            | 3/4                           | 2 <sup>3</sup> / <sub>16</sub> | 0.475 | 2 <sup>1</sup> / <sub>16</sub>  | 3/4                            | 0.213 |
| 5 | 2 | 6 <sup>1</sup> / <sub>16</sub>  | 1.748 | 1/4                           | 5/8                            | 3/4                           | 2 <sup>3</sup> / <sub>16</sub> | 0.700 | 2 <sup>1</sup> / <sub>16</sub>  | 7/8                            | 0.260 |
| 5 | 3 | 6 <sup>1</sup> / <sub>16</sub>  | 1.748 | 1/4                           | 5/8                            | 3/4                           | 3 <sup>1</sup> / <sub>4</sub>  | 0.938 | 3 <sup>1</sup> / <sub>16</sub>  | 1 <sup>3</sup> / <sub>16</sub> | 0.322 |
| 5 | 4 | 6 <sup>5</sup> / <sub>8</sub>   | 1.748 | 3/4                           | 5/8                            | 3/4                           | 4 <sup>1</sup> / <sub>8</sub>  | 1.231 | 3 <sup>7</sup> / <sub>8</sub>   | 1 <sup>1</sup> / <sub>4</sub>  | 0.478 |
| 6 | 1 | 8 <sup>5</sup> / <sub>8</sub>   | 2.494 | 3/8                           | 3/4                            | 1 <sup>1</sup> / <sub>8</sub> | 2 <sup>3</sup> / <sub>16</sub> | 0.475 | 2 <sup>1</sup> / <sub>16</sub>  | 3/4                            | 0.213 |
| 6 | 2 | 8 <sup>5</sup> / <sub>8</sub>   | 2.494 | 3/8                           | 3/4                            | 1 <sup>1</sup> / <sub>8</sub> | 2 <sup>5</sup> / <sub>8</sub>  | 0.700 | 2 <sup>1</sup> / <sub>16</sub>  | 7/8                            | 0.260 |
| 6 | 3 | 8 <sup>5</sup> / <sub>8</sub>   | 2.494 | 3/8                           | 3/4                            | 1 <sup>1</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>4</sub>  | 0.938 | 3 <sup>1</sup> / <sub>16</sub>  | 1 <sup>3</sup> / <sub>16</sub> | 0.322 |
| 6 | 4 | 8 <sup>5</sup> / <sub>8</sub>   | 2.494 | 3/8                           | 3/4                            | 1 <sup>1</sup> / <sub>8</sub> | 4 <sup>1</sup> / <sub>8</sub>  | 1.231 | 3 <sup>7</sup> / <sub>8</sub>   | 1 <sup>1</sup> / <sub>4</sub>  | 0.478 |
| 6 | 5 | 8 <sup>5</sup> / <sub>8</sub>   | 2.494 | 3/8                           | 3/4                            | 1 <sup>1</sup> / <sub>8</sub> | 5 <sup>1</sup> / <sub>4</sub>  | 1.748 | 4 <sup>15</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>2</sub>  | 0.635 |
| 7 | 3 | 11 <sup>5</sup> / <sub>8</sub>  | 3.270 | 3/8                           | 1 <sup>1</sup> / <sub>8</sub>  | 1 <sup>3</sup> / <sub>8</sub> | 3 <sup>1</sup> / <sub>4</sub>  | 0.938 | 3 <sup>1</sup> / <sub>16</sub>  | 1 <sup>3</sup> / <sub>16</sub> | 0.322 |
| 7 | 4 | 11 <sup>5</sup> / <sub>8</sub>  | 3.270 | 3/8                           | 1 <sup>1</sup> / <sub>8</sub>  | 1 <sup>3</sup> / <sub>8</sub> | 4 <sup>1</sup> / <sub>8</sub>  | 1.231 | 3 <sup>7</sup> / <sub>8</sub>   | 1 <sup>1</sup> / <sub>4</sub>  | 0.478 |
| 7 | 5 | 11 <sup>5</sup> / <sub>8</sub>  | 3.270 | 3/8                           | 1 <sup>1</sup> / <sub>8</sub>  | 1 <sup>3</sup> / <sub>8</sub> | 5 <sup>1</sup> / <sub>4</sub>  | 1.748 | 4 <sup>15</sup> / <sub>16</sub> | 1 <sup>1</sup> / <sub>2</sub>  | 0.635 |
| 7 | 6 | 12 <sup>1</sup> / <sub>2</sub>  | 3.270 | 1 <sup>1</sup> / <sub>4</sub> | 1 <sup>1</sup> / <sub>8</sub>  | 1 <sup>3</sup> / <sub>8</sub> | 7 <sup>3</sup> / <sub>8</sub>  | 2.494 | 7                               | 1 <sup>3</sup> / <sub>4</sub>  | 0.760 |

**Table 9. Morse Taper Sockets — Hole and Shank Sizes**

| Size   | Morse Taper |       | Size   | Morse Taper |       | Size   | Morse Taper |       |
|--------|-------------|-------|--------|-------------|-------|--------|-------------|-------|
|        | Hole        | Shank |        | Hole        | Shank |        | Hole        | Shank |
| 1 by 2 | No. 1       | No. 2 | 2 by 5 | No. 2       | No. 5 | 4 by 4 | No. 4       | No. 4 |
| 1 by 3 | No. 1       | No. 3 | 3 by 2 | No. 3       | No. 2 | 4 by 5 | No. 4       | No. 5 |
| 1 by 4 | No. 1       | No. 4 | 3 by 3 | No. 3       | No. 3 | 4 by 6 | No. 4       | No. 6 |
| 1 by 5 | No. 1       | No. 5 | 3 by 4 | No. 3       | No. 4 | 5 by 4 | No. 5       | No. 4 |
| 2 by 3 | No. 2       | No. 3 | 3 by 5 | No. 3       | No. 5 | 5 by 5 | No. 5       | No. 5 |
| 2 by 4 | No. 2       | No. 4 | 4 by 3 | No. 4       | No. 3 | 5 by 6 | No. 5       | No. 6 |

### Diamond Wheels

**Diamond Wheels.**—A diamond wheel is a special type of grinding wheel in which the abrasive elements are diamond grains held in a bond and applied to form a layer on the operating face of a non-abrasive core. Diamond wheels are used for grinding very hard or highly abrasive materials. Primary applications are the grinding of cemented carbides, such as the sharpening of carbide cutting tools; the grinding of glass, ceramics, asbestos, and cement products; and the cutting and slicing of germanium and silicon.

**Shapes of Diamond Wheels.**—The industry-wide accepted Standard (ANSI B74.3-2003 (R2014)) specifies ten basic diamond wheel core shapes which are shown in Table 1 with the applicable designation symbols. The applied diamond abrasive layer may have different cross-sectional shapes. Those standardized are shown in Table 2. The third aspect which is standardized is the location of the diamond section on the wheel as shown by the diagrams in Table 3. Finally, modifications of the general core shape together with pertinent designation letters are given in Table 4.

The characteristics of the wheel shape listed in these four tables make up the components of the standard designation symbol for diamond wheel shapes. An example of that symbol with arbitrarily selected components is shown in Fig. 1.

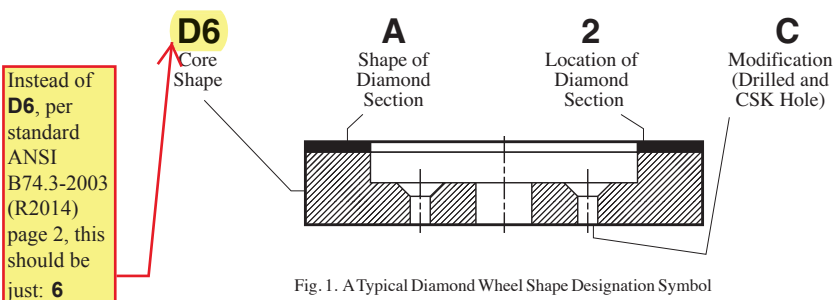


Fig. 1. A Typical Diamond Wheel Shape Designation Symbol

An explanation of these components is as follows:

**Basic Core Shape:** This portion of the symbol indicates the basic shape of the core on which the diamond abrasive section is mounted. The shape is actually designated by a number. The various core shapes and their designations are given in Table 1.

**Diamond Cross-Sectional Shape:** This, the second component, consisting of one or two letters, denotes the cross-sectional shape of the diamond abrasive section. The various shapes and their corresponding letter designations are given in Table 2.

**Diamond Section Location:** The third component of the symbol consists of a number which gives the location of the diamond section, i.e., periphery, side, corner, etc. An explanation of these numbers is shown in Table 3.

**Modification:** The fourth component of the symbol is a letter designating some modification, such as drilled and counterbored holes for mounting or special relieving of diamond section or core. This modification position of the symbol is used only when required. The modifications and their designations are given in Table 4.

**Table 3. (Continued) Designations for Location of Diamond Section on Diamond Wheel ANSI B74.3-2003 (R2014)**

| Designation No. and Location | Description                                                                                                                                                                      | Illustration                                                                      |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| 9 — Corner                   | Designates a location which would commonly be considered to be on the periphery except that the diamond section shall be on the corner but shall not extend to the other corner. |  |
| 10 — Annular                 | Designates a location of the diamond abrasive section on the inner annular surface of the wheel.                                                                                 |  |

**Composition of Diamond and Cubic Boron Nitride Wheels.**—According to American National Standard ANSI B74.13-2016, a series of symbols is used to designate the composition of these wheels. An example is shown below.

| Prefix   | Abrasive | Grain Size | Grade    | Concentration | Bond Type | Bond Modification | Depth of Abrasive | Manufacturer's Identification Symbol |
|----------|----------|------------|----------|---------------|-----------|-------------------|-------------------|--------------------------------------|
| <b>M</b> | <b>D</b> | <b>120</b> | <b>R</b> | <b>100</b>    | <b>B</b>  | <b>56</b>         | $\frac{1}{8}$     | <b>*</b>                             |

Fig. 2. Designation Symbols for Composition of Diamond and Cubic Boron Nitride Wheels

The meaning of each symbol is indicated by the following list:

1) **Prefix:** The prefix is a manufacturer's symbol indicating the exact kind of abrasive. Its use is optional.

2) **Abrasive Type:** The letter (B) is used for cubic boron nitride and (D) for diamond.

3) **Grain Size:** The grain sizes commonly used and varying from coarse to very fine are indicated by the following numbers: 8, 10, 12, 14, 16, 20, 24, 30, 36, 46, 54, 60, 70, 80, 90, 100, 120, 150, 180, and 220. The following additional sizes are used occasionally: 240, 280, 320, 400, 500, and 600. The wheel manufacturer may add to the regular grain number an additional symbol to indicate a special grain combination.

4) **Grade:** Grades are indicated by letters of the alphabet from A to Z in all bonds or processes. Wheel grades from A to Z range from soft to hard.

5) **Concentration:** The concentration symbol is a manufacturer's designation. It may be a number or a symbol.

6) **Bond:** Bonds are indicated by the following letters: B, resinoid; V, vitrified; M, metal.

7) **Bond Modification:** Within each bond type a manufacturer may have modifications to tailor the bond to a specific application. These modifications may be identified by either letters or numbers.

8) **Abrasive Depth:** Abrasive section depth, in inches or millimeters (inches illustrated), is indicated by a number or letter which is the amount of total dimensional wear a user may expect from the abrasive portion of the product. Most diamond and CBN wheels are made with a depth of coating on the order of  $\frac{1}{16}$  in.,  $\frac{1}{8}$  in., (1.6 mm, 3.2 mm) or more as specified. In some cases the diamond is applied in thinner layers, as thin as one thickness of diamond grains. The L is included in the marking system to identify a layered type product.

9) **Manufacturer's Identification Symbol:** The use of this symbol is optional.

Per standard ANSI B74.13-2016, page 3, **R** should be **N**

**Table 4. American National Standard and Unified Standard Heavy Hex Screws and Hex Cap Screws ANSI/ASME B18.2.1-2012**

| Nominal Sizes <sup>a</sup><br>or Basic<br>Product Dia. | Body Dia.<br><i>E</i> |        | Width Across<br>Flats <i>F</i> |                        |       |       | Width Across<br>Corners <i>G</i> |        | Height<br><i>H</i>    |       |       | Thread<br>Length <sup>b</sup> <i>L<sub>T</sub></i> |
|--------------------------------------------------------|-----------------------|--------|--------------------------------|------------------------|-------|-------|----------------------------------|--------|-----------------------|-------|-------|----------------------------------------------------|
|                                                        | Max.                  | Min.   | Basic                          | Max.                   | Min.  |       | Max.                             | Min.   | Basic                 | Max.  | Min.  | Basic                                              |
| HEAVY HEX SCREWS (Fig. 4)                              |                       |        |                                |                        |       |       |                                  |        |                       |       |       |                                                    |
| $\frac{3}{8}$                                          | 0.3750                | 0.3750 | 0.360                          | $\frac{11}{16}$        | 0.688 | 0.669 | 0.794                            | 0.763  | $\frac{13}{64}$       | 0.243 | 0.226 | 1.000                                              |
| $\frac{1}{2}$                                          | 0.5000                | 0.5000 | 0.482                          | $\frac{7}{8}$          | 0.875 | 0.850 | 1.010                            | 0.969  | $\frac{5}{16}$        | 0.323 | 0.302 | 1.250                                              |
| $\frac{5}{8}$                                          | 0.6250                | 0.6250 | 0.605                          | $\frac{1\frac{1}{8}}$  | 1.062 | 1.031 | 1.227                            | 1.175  | $\frac{3}{8}$         | 0.403 | 0.378 | 1.500                                              |
| $\frac{3}{4}$                                          | 0.7500                | 0.7500 | 0.729                          | $\frac{1\frac{1}{4}}$  | 1.250 | 1.212 | 1.443                            | 1.383  | $\frac{1}{2}$         | 0.483 | 0.455 | 1.750                                              |
| $\frac{7}{8}$                                          | 0.8750                | 0.8750 | 0.852                          | $\frac{1\frac{3}{8}}$  | 1.438 | 1.394 | 1.660                            | 1.589  | $\frac{5}{8}$         | 0.563 | 0.531 | 2.000                                              |
| 1                                                      | 1.0000                | 1.0000 | 0.976                          | $\frac{1\frac{1}{2}}$  | 1.625 | 1.575 | 1.876                            | 1.796  | $\frac{3}{4}$         | 0.627 | 0.591 | 2.250                                              |
| $\frac{1\frac{1}{8}}$                                  | 1.1250                | 1.1250 | 1.098                          | $\frac{1\frac{5}{8}}$  | 1.812 | 1.756 | 2.093                            | 2.002  | $\frac{1\frac{1}{8}}$ | 0.718 | 0.658 | 2.500                                              |
| $\frac{1\frac{1}{4}}$                                  | 1.2500                | 1.2500 | 1.223                          | 2                      | 2.000 | 1.938 | 2.309                            | 2.209  | $\frac{1\frac{1}{4}}$ | 0.813 | 0.749 | 2.750                                              |
| $\frac{1\frac{3}{8}}$                                  | 1.3750                | 1.3750 | 1.345                          | $\frac{2\frac{1}{8}}$  | 2.188 | 2.119 | 2.526                            | 2.416  | $\frac{1\frac{3}{8}}$ | 0.878 | 0.810 | 3.000                                              |
| $\frac{1\frac{1}{2}}$                                  | 1.5000                | 1.5000 | 1.470                          | $\frac{2\frac{1}{4}}$  | 2.375 | 2.300 | 2.742                            | 2.622  | $\frac{1\frac{1}{2}}$ | 0.974 | 0.902 | 3.250                                              |
| $\frac{1\frac{3}{4}}$                                  | 1.6250                | 1.6250 | 1.591                          | $\frac{2\frac{3}{8}}$  | 2.562 | 2.481 | 2.959                            | 2.829  | 1                     | 1.038 | 0.962 | 3.500                                              |
| $\frac{1\frac{7}{8}}$                                  | 1.7500                | 1.7500 | 1.716                          | $\frac{2\frac{1}{2}}$  | 2.750 | 2.662 | 3.175                            | 3.035  | $\frac{1\frac{3}{4}}$ | 1.134 | 1.054 | 3.750                                              |
| 2                                                      | 1.8750                | 1.8750 | 1.839                          | $\frac{2\frac{5}{8}}$  | 2.938 | 2.844 | 3.392                            | 3.242  | $\frac{1\frac{7}{8}}$ | 1.198 | 1.114 | 4.000                                              |
| 2.0000                                                 | 2.0000                | 1.964  | $\frac{3}{4}$                  | 3.125                  | 3.025 | 3.608 | 3.449                            | 3.289  | $\frac{1\frac{7}{8}}$ | 1.263 | 1.175 | 4.250                                              |
| $\frac{2\frac{1}{4}}$                                  | 2.2500                | 2.2500 | 2.214                          | $\frac{3\frac{1}{2}}$  | 3.500 | 3.388 | 4.041                            | 3.862  | $\frac{1\frac{3}{8}}$ | 1.423 | 1.327 | 5.000                                              |
| $\frac{2\frac{1}{2}}$                                  | 2.5000                | 2.5000 | 2.461                          | $\frac{3\frac{3}{8}}$  | 3.875 | 3.750 | 4.474                            | 4.275  | $\frac{1\frac{1}{2}}$ | 1.583 | 1.479 | 5.500                                              |
| $\frac{2\frac{3}{4}}$                                  | 2.7500                | 2.7500 | 2.711                          | $\frac{4\frac{1}{4}}$  | 4.250 | 4.112 | 4.907                            | 4.688  | $\frac{1\frac{1}{4}}$ | 1.744 | 1.632 | 6.000                                              |
| 3                                                      | 3.0000                | 3.0000 | 2.961                          | $\frac{4\frac{3}{8}}$  | 4.625 | 4.475 | 5.340                            | 5.102  | $\frac{1\frac{3}{4}}$ | 1.935 | 1.815 | 6.500                                              |
| $\frac{3\frac{1}{4}}$                                  | 3.2500                | 3.2500 | 3.210                          | 5                      | 5.000 | 4.838 | 5.774                            | 5.515  | 2                     | 2.126 | 1.998 | 7.000                                              |
| $\frac{3\frac{1}{2}}$                                  | 3.5000                | 3.5000 | 3.461                          | $\frac{5\frac{1}{8}}$  | 5.375 | 5.200 | 6.207                            | 5.928  | $\frac{2\frac{1}{4}}$ | 2.256 | 2.120 | 7.500                                              |
| $\frac{3\frac{3}{4}}$                                  | 3.7500                | 3.7500 | 3.711                          | $\frac{5\frac{3}{8}}$  | 5.750 | 5.562 | 6.640                            | 6.341  | $\frac{2\frac{3}{8}}$ | 2.447 | 2.303 | 8.000                                              |
| 4                                                      | 4.0000                | 4.0000 | 3.961                          | $\frac{6\frac{1}{8}}$  | 6.125 | 5.925 | 7.073                            | 6.755  | $\frac{2\frac{1}{2}}$ | 2.576 | 2.424 | 8.500                                              |
| $\frac{4\frac{1}{4}}$                                  | 4.2500                | 4.2500 | 4.223                          | $\frac{6\frac{1}{4}}$  | 6.500 | 6.288 | 7.506                            | 7.168  | $\frac{2\frac{3}{4}}$ | 2.768 | 2.608 | 9.000                                              |
| $\frac{4\frac{1}{2}}$                                  | 4.5000                | 4.5000 | 4.473                          | $\frac{6\frac{3}{8}}$  | 6.875 | 6.650 | 7.939                            | 7.581  | $\frac{2\frac{7}{8}}$ | 2.896 | 2.728 | 9.500                                              |
| $\frac{4\frac{3}{4}}$                                  | 4.7500                | 4.7500 | 4.723                          | $\frac{7\frac{1}{4}}$  | 7.250 | 7.012 | 8.372                            | 7.994  | 3                     | 3.088 | 2.912 | 10.000                                             |
| 5                                                      | 5.0000                | 5.0000 | 4.973                          | $\frac{7\frac{3}{8}}$  | 7.625 | 7.375 | 8.805                            | 8.408  | $\frac{3\frac{1}{4}}$ | 3.217 | 3.033 | 10.500                                             |
| $\frac{5\frac{1}{4}}$                                  | 5.2500                | 5.2500 | 5.223                          | 8                      | 8.000 | 7.738 | 9.238                            | 8.821  | $\frac{3\frac{3}{8}}$ | 3.408 | 3.216 | 11.000                                             |
| $\frac{5\frac{1}{2}}$                                  | 5.5000                | 5.5000 | 5.473                          | $\frac{8\frac{1}{8}}$  | 8.375 | 8.100 | 9.671                            | 9.234  | $\frac{3\frac{1}{2}}$ | 3.538 | 3.338 | 11.500                                             |
| $\frac{5\frac{3}{4}}$                                  | 5.7500                | 5.7500 | 5.723                          | $\frac{8\frac{3}{8}}$  | 8.750 | 8.462 | 10.104                           | 9.647  | $\frac{3\frac{3}{4}}$ | 3.729 | 3.521 | 12.000                                             |
| 6                                                      | 6.0000                | 6.0000 | 5.973                          | $\frac{9\frac{1}{8}}$  | 9.125 | 8.825 | 10.537                           | 10.060 | $\frac{3\frac{3}{8}}$ | 3.858 | 3.642 | 12.500                                             |
| HEX CAP SCREWS (Finished Hex Bolts) (Fig. 4)           |                       |        |                                |                        |       |       |                                  |        |                       |       |       |                                                    |
| $\frac{1}{4}$                                          | 0.2500                | 0.2500 | 0.2450                         | $\frac{7}{16}$         | 0.438 | 0.428 | 0.505                            | 0.488  | $\frac{5}{32}$        | 0.163 | 0.150 | 0.750                                              |
| $\frac{5}{16}$                                         | 0.3125                | 0.3125 | 0.3065                         | $\frac{1}{2}$          | 0.500 | 0.489 | 0.577                            | 0.557  | $\frac{13}{64}$       | 0.211 | 0.195 | 0.875                                              |
| $\frac{3}{8}$                                          | 0.3750                | 0.3750 | 0.3690                         | $\frac{9}{16}$         | 0.562 | 0.551 | 0.650                            | 0.628  | $\frac{1}{4}$         | 0.243 | 0.226 | 1.000                                              |
| $\frac{7}{16}$                                         | 0.4375                | 0.4375 | 0.4305                         | $\frac{5}{8}$          | 0.625 | 0.612 | 0.722                            | 0.698  | $\frac{5}{16}$        | 0.291 | 0.272 | 1.125                                              |
| $\frac{1}{2}$                                          | 0.5000                | 0.5000 | 0.4930                         | $\frac{3}{4}$          | 0.750 | 0.736 | 0.866                            | 0.840  | $\frac{3}{8}$         | 0.323 | 0.302 | 1.250                                              |
| $\frac{9}{16}$                                         | 0.5625                | 0.5625 | 0.5545                         | $\frac{1\frac{1}{16}}$ | 0.812 | 0.798 | 0.938                            | 0.910  | $\frac{2\frac{1}{4}}$ | 0.371 | 0.348 | 1.375                                              |
| $\frac{5}{8}$                                          | 0.6250                | 0.6250 | 0.6170                         | $\frac{1\frac{1}{8}}$  | 0.938 | 0.922 | 1.083                            | 1.051  | $\frac{5}{8}$         | 0.403 | 0.378 | 1.500                                              |
| $\frac{3}{4}$                                          | 0.7500                | 0.7500 | 0.7410                         | $\frac{1\frac{1}{4}}$  | 1.125 | 1.100 | 1.299                            | 1.254  | $\frac{1\frac{1}{2}}$ | 0.483 | 0.455 | 1.750                                              |
| $\frac{7}{8}$                                          | 0.8750                | 0.8750 | 0.8660                         | $\frac{1\frac{1}{2}}$  | 1.312 | 1.285 | 1.516                            | 1.465  | $\frac{1\frac{3}{4}}$ | 0.563 | 0.531 | 2.000                                              |
| 1                                                      | 1.0000                | 1.0000 | 0.9900                         | $\frac{1\frac{1}{2}}$  | 1.500 | 1.469 | 1.732                            | 1.675  | $\frac{3\frac{1}{4}}$ | 0.627 | 0.591 | 2.250                                              |
| $\frac{1\frac{1}{8}}$                                  | 1.1250                | 1.1250 | 1.1140                         | $\frac{1\frac{1}{2}}$  | 1.688 | 1.631 | 1.949                            | 1.859  | $\frac{1\frac{1}{8}}$ | 0.718 | 0.658 | 2.500                                              |
| $\frac{1\frac{1}{4}}$                                  | 1.2500                | 1.2500 | 1.2390                         | $\frac{1\frac{3}{8}}$  | 1.875 | 1.812 | 2.165                            | 2.066  | $\frac{1\frac{1}{4}}$ | 0.813 | 0.749 | 2.750                                              |
| $\frac{1\frac{3}{8}}$                                  | 1.3750                | 1.3750 | 1.3630                         | $\frac{1\frac{1}{2}}$  | 2.062 | 1.994 | 2.382                            | 2.273  | $\frac{1\frac{3}{8}}$ | 0.878 | 0.810 | 3.000                                              |
| $\frac{1\frac{1}{2}}$                                  | 1.5000                | 1.5000 | 1.4880                         | $\frac{2\frac{1}{4}}$  | 2.250 | 2.175 | 2.598                            | 2.480  | $\frac{1\frac{1}{2}}$ | 0.974 | 0.902 | 3.250                                              |
| $\frac{1\frac{3}{4}}$                                  | 1.6250                | 1.6250 | 1.6130                         | $\frac{2\frac{1}{2}}$  | 2.438 | 2.356 | 2.815                            | 2.686  | 1                     | 1.038 | 0.962 | 3.500                                              |
| 2                                                      | 1.7500                | 1.7500 | 1.7380                         | $\frac{2\frac{3}{8}}$  | 2.625 | 2.538 | 3.031                            | 2.893  | $\frac{1\frac{3}{4}}$ | 1.134 | 1.054 | 3.750                                              |
| $\frac{1\frac{7}{8}}$                                  | 1.8750                | 1.8750 | 1.8630                         | $\frac{2\frac{5}{8}}$  | 2.812 | 2.719 | 3.248                            | 3.099  | $\frac{1\frac{7}{8}}$ | 1.198 | 1.114 | 4.000                                              |
| 2.0000                                                 | 2.0000                | 1.9880 | 3                              | 3.000                  | 2.900 | 3.464 | 3.306                            | 3.178  | $\frac{1\frac{7}{8}}$ | 1.263 | 1.175 | 4.250                                              |
| $\frac{2\frac{1}{4}}$                                  | 2.2500                | 2.2500 | 2.2380                         | $\frac{3\frac{1}{8}}$  | 3.375 | 3.262 | 3.897                            | 3.719  | $\frac{1\frac{3}{8}}$ | 1.423 | 1.327 | 5.000                                              |
| $\frac{2\frac{1}{2}}$                                  | 2.5000                | 2.5000 | 2.4880                         | $\frac{3\frac{3}{8}}$  | 3.750 | 3.625 | 4.338                            | 4.133  | $\frac{1\frac{1}{2}}$ | 1.583 | 1.479 | 5.500                                              |
| $\frac{2\frac{3}{4}}$                                  | 2.7500                | 2.7500 | 2.7380                         | $\frac{4\frac{1}{4}}$  | 4.125 | 3.988 | 4.763                            | 4.546  | $\frac{1\frac{1}{4}}$ | 1.744 | 1.632 | 6.000                                              |
| 3                                                      | 3.0000                | 3.0000 | 2.9880                         | $\frac{4\frac{3}{8}}$  | 4.500 | 4.350 | 5.196                            | 4.959  | $\frac{1\frac{3}{4}}$ | 1.935 | 1.815 | 6.500                                              |

<sup>a</sup> Nominal Size: Where specifying nominal size in decimals, zeros preceding the decimal and in the fourth decimal place are omitted.

<sup>b</sup> Thread lengths, *L<sub>T</sub>*, shown are for bolt lengths 6 inches and shorter. For longer bolt lengths add 0.250 inch to thread lengths shown.

<sup>c</sup> Thread lengths, *L<sub>T</sub>*, shown are for bolt lengths over 6 inches.

All dimensions are in inches.

**Unification:** Bold type indicates product features unified dimensionally with British and Canadian Standards. Unification of fine thread products is limited to sizes 1 inch and smaller.

**Bearing Surface:** Bearing surface is flat and washer faced. Diameter of bearing surface is equal to the maximum width across flats within a tolerance of minus 10 percent.

**Threads Series:** Threads, when rolled, are Unified Coarse, Fine, or 8-thread series (UNRC, UNRF, or 8 UNR Series), Class 2A. Threads produced by other methods shall preferably be UNRC, UNRF or 8 UNR but, at manufacturer's option, may be Unified Fine, Fine or 8-thread series (UNC, UNF, or 8 UN Series), Class 2A.

**Material:** Chemical and mechanical properties of steel screws normally conform to Grades 2, 5, or 8 of SAE J429, ASTM A449 or ASTM A354 Grade BD. Where specified, screws may also be made from brass, bronze, corrosion-resisting steel, aluminum alloy or other materials.

6.0000 6.0000  
corrected  
(previously  
incorrectly read  
5.0000 5.0000).

**Table 1. Wrench Openings for Nuts ANSI/ASME B18.2.2-2015, Appendix**

| Max. $\pm$ Width<br>Across Flats<br>of Nut | Wrench Opening <sup>b</sup> |       | Max. $\pm$ Width<br>Across Flats<br>of Nut | Wrench Opening <sup>b</sup> |       | Max. $\pm$ Width<br>Across Flats<br>of Nut | Wrench Opening <sup>b</sup> |       |
|--------------------------------------------|-----------------------------|-------|--------------------------------------------|-----------------------------|-------|--------------------------------------------|-----------------------------|-------|
|                                            | Min.                        | Max.  |                                            | Min.                        | Max.  |                                            | Min.                        | Max.  |
| $\frac{5}{32}$                             | 0.158                       | 0.163 | $\frac{1}{4}$                              | 1.257                       | 1.267 | $2\frac{1}{16}$                            | 2.954                       | 2.973 |
| $\frac{3}{16}$                             | 0.190                       | 0.195 | $\frac{1}{4}$                              | 1.320                       | 1.331 | 3                                          | 3.016                       | 3.035 |
| $\frac{7}{32}$                             | 0.220                       | 0.225 | $\frac{1}{8}$                              | 1.383                       | 1.394 | $\frac{3}{8}$                              | 3.142                       | 3.162 |
| $\frac{1}{4}$                              | 0.252                       | 0.257 | $\frac{1}{16}$                             | 1.446                       | 1.457 | $\frac{3}{8}$                              | 3.393                       | 3.414 |
| $\frac{9}{32}$                             | 0.283                       | 0.288 | $\frac{1}{2}$                              | 1.508                       | 1.520 | $\frac{3}{2}$                              | 3.518                       | 3.540 |
| $\frac{5}{16}$                             | 0.316                       | 0.322 | $\frac{1}{8}$                              | 1.634                       | 1.646 | $\frac{3}{4}$                              | 3.770                       | 3.793 |
| $1\frac{1}{32}$                            | 0.347                       | 0.353 | $1\frac{1}{16}$                            | 1.696                       | 1.708 | $\frac{3}{8}$                              | 3.895                       | 3.918 |
| $\frac{3}{8}$                              | 0.378                       | 0.384 | $1\frac{1}{16}$                            | 1.822                       | 1.835 | $4\frac{1}{8}$                             | 4.147                       | 4.172 |
| $\frac{7}{16}$                             | 0.440                       | 0.446 | $\frac{1}{8}$                              | 1.885                       | 1.898 | $\frac{4}{16}$                             | 4.272                       | 4.297 |
| $\frac{1}{2}$                              | 0.504                       | 0.510 | 2                                          | 2.011                       | 2.025 | $\frac{4}{2}$                              | 4.524                       | 4.550 |
| $\frac{9}{16}$                             | 0.566                       | 0.573 | $\frac{2}{16}$                             | 2.074                       | 2.088 | $\frac{4}{8}$                              | 4.649                       | 4.676 |
| $\frac{5}{8}$                              | 0.629                       | 0.636 | $\frac{2}{16}$                             | 2.200                       | 2.215 | $\frac{4}{8}$                              | 4.900                       | 4.928 |
| $\frac{11}{16}$                            | 0.692                       | 0.699 | $\frac{2}{4}$                              | 2.262                       | 2.277 | 5                                          | 5.026                       | 5.055 |
| $\frac{3}{4}$                              | 0.755                       | 0.763 | $\frac{2}{8}$                              | 2.388                       | 2.404 | $\frac{5}{16}$                             | 5.277                       | 5.307 |
| $\frac{13}{16}$                            | 0.818                       | 0.826 | $\frac{2}{16}$                             | 2.450                       | 2.466 | $\frac{5}{8}$                              | 5.403                       | 5.434 |
| $\frac{7}{8}$                              | 0.880                       | 0.888 | $\frac{2}{16}$                             | 2.576                       | 2.593 | $\frac{5}{8}$                              | 5.654                       | 5.686 |
| $\frac{15}{16}$                            | 0.944                       | 0.953 | $\frac{2}{8}$                              | 2.639                       | 2.656 | $\frac{5}{4}$                              | 5.780                       | 5.813 |
| 1                                          | 1.006                       | 1.015 | $\frac{2}{4}$                              | 2.766                       | 2.783 | 6                                          | 6.031                       | 6.157 |
| $1\frac{1}{16}$                            | 1.068                       | 1.077 | $2\frac{1}{16}$                            | 2.827                       | 2.845 | $\frac{6}{8}$                              | 6.065                       | 6.192 |
| $1\frac{1}{8}$                             | 1.132                       | 1.142 |                                            |                             |       |                                            |                             |       |

1 1/16  
corrected  
(1 added;  
previously was  
just 1/16).

<sup>a</sup> Wrenches are marked with the “Nominal Size of Wrench,” which is equal to the basic or maximum width across flats of the corresponding nut. Minimum wrench opening is (1.005W + 0.001). Tolerance on wrench opening is (0.005W + 0.004) from minimum, where W equals nominal size of wrench.

<sup>b</sup> Openings for  $\frac{5}{32}$  to  $\frac{3}{8}$  widths from old ASA B18.2-1960 and italic values are from former ANSI B18.2.2-1972.

All dimensions given in inches.

**Table 2. Clearances for Open End Engineers Wrench (15°)**

| Nominal Wrench<br>Size | A          |            | B <sup>a</sup> |            | C          |            | D          |            | E          |            | F <sup>b</sup> |            | G          |            | H <sup>c</sup> |  | J Min. <sup>d</sup><br>in.-lbf |
|------------------------|------------|------------|----------------|------------|------------|------------|------------|------------|------------|------------|----------------|------------|------------|------------|----------------|--|--------------------------------|
|                        | Min. (in.) | Max. (in.) | Min. (in.)     | Max. (in.) | Min. (in.) | Max. (in.) | Min. (in.) | Max. (in.) | Min. (in.) | Max. (in.) | Min. (in.)     | Max. (in.) | Ref. (in.) | Max. (in.) | Max. (in.)     |  |                                |
| $\frac{5}{32}$         | 0.156      | 0.220      | 0.250          | 0.390      | 0.160      | 0.250      | 0.200      | 0.030      | 0.094      | 35         |                |            |            |            |                |  |                                |
| $\frac{3}{16}$         | 0.188      | 0.250      | 0.280          | 0.430      | 0.190      | 0.270      | 0.230      | 0.030      | 0.172      | 45         |                |            |            |            |                |  |                                |
| $\frac{1}{4}$          | 0.250      | 0.280      | 0.340          | 0.530      | 0.270      | 0.310      | 0.310      | 0.030      | 0.172      | 67         |                |            |            |            |                |  |                                |
| $\frac{5}{16}$         | 0.313      | 0.380      | 0.470          | 0.660      | 0.280      | 0.390      | 0.390      | 0.050      | 0.203      | 138        |                |            |            |            |                |  |                                |
| $1\frac{1}{32}$        | 0.344      | 0.420      | 0.500          | 0.750      | 0.340      | 0.450      | 0.450      | 0.050      | 0.203      | 193        |                |            |            |            |                |  |                                |
| $\frac{3}{8}$          | 0.375      | 0.420      | 0.500          | 0.780      | 0.360      | 0.450      | 0.520      | 0.050      | 0.219      | 275        |                |            |            |            |                |  |                                |
| $\frac{7}{16}$         | 0.438      | 0.470      | 0.590          | 0.890      | 0.420      | 0.520      | 0.640      | 0.050      | 0.250      | 413        |                |            |            |            |                |  |                                |
| $\frac{1}{2}$          | 0.500      | 0.520      | 0.640          | 1.000      | 0.470      | 0.580      | 0.660      | 0.050      | 0.266      | 550        |                |            |            |            |                |  |                                |
| $\frac{9}{16}$         | 0.563      | 0.590      | 0.770          | 1.130      | 0.520      | 0.660      | 0.700      | 0.050      | 0.297      | 770        |                |            |            |            |                |  |                                |
| $\frac{5}{8}$          | 0.625      | 0.640      | 0.830          | 1.230      | 0.550      | 0.700      | 0.700      | 0.050      | 0.344      | 1100       |                |            |            |            |                |  |                                |
| $\frac{11}{16}$        | 0.688      | 0.770      | 0.920          | 1.470      | 0.660      | 0.880      | 0.800      | 0.060      | 0.375      | 1375       |                |            |            |            |                |  |                                |
| $\frac{3}{4}$          | 0.750      | 0.770      | 0.920          | 1.510      | 0.670      | 0.880      | 0.800      | 0.060      | 0.375      | 1650       |                |            |            |            |                |  |                                |
| $\frac{13}{16}$        | 0.813      | 0.910      | 1.120          | 1.660      | 0.720      | 0.970      | 0.860      | 0.060      | 0.406      | 2200       |                |            |            |            |                |  |                                |
| $\frac{7}{8}$          | 0.875      | 0.970      | 1.150          | 1.810      | 0.800      | 1.060      | 0.910      | 0.060      | 0.438      | 2475       |                |            |            |            |                |  |                                |
| $\frac{15}{16}$        | 0.938      | 0.970      | 1.150          | 1.850      | 0.810      | 1.060      | 0.950      | 0.060      | 0.438      | 3025       |                |            |            |            |                |  |                                |
| 1                      | 1.000      | 1.050      | 1.230          | 2.000      | 0.880      | 1.160      | 1.060      | 0.060      | 0.500      | 3575       |                |            |            |            |                |  |                                |
| $1\frac{1}{16}$        | 1.063      | 1.090      | 1.250          | 2.100      | 0.970      | 1.200      | 1.200      | 0.080      | 0.500      | 3850       |                |            |            |            |                |  |                                |
| $1\frac{1}{8}$         | 1.125      | 1.140      | 1.370          | 2.210      | 1.000      | 1.270      | 1.230      | 0.080      | 0.500      | 4400       |                |            |            |            |                |  |                                |
| $1\frac{1}{4}$         | 1.250      | 1.270      | 1.420          | 2.440      | 1.080      | 1.390      | 1.310      | 0.080      | 0.562      | 5775       |                |            |            |            |                |  |                                |
| $1\frac{3}{8}$         | 1.313      | 1.390      | 1.690          | 2.630      | 1.170      | 1.520      | 1.340      | 0.080      | 0.562      | 6600       |                |            |            |            |                |  |                                |
| $1\frac{7}{16}$        | 1.438      | 1.470      | 1.720          | 2.800      | 1.250      | 1.590      | 1.340      | 0.090      | 0.641      | 8250       |                |            |            |            |                |  |                                |
| $1\frac{1}{2}$         | 1.500      | 1.470      | 1.720          | 2.840      | 1.270      | 1.590      | 1.450      | 0.090      | 0.641      | 8500       |                |            |            |            |                |  |                                |
| $1\frac{5}{8}$         | 1.625      | 1.560      | 1.880          | 3.100      | 1.380      | 1.750      | 1.560      | 0.090      | 0.641      | 9000       |                |            |            |            |                |  |                                |

<sup>a</sup> B = arc radius created by the swing of the wrench.

<sup>b</sup> F = inside arc radius of part.

<sup>c</sup> H = thickness of wrench head. (Dimension line not shown.)

<sup>d</sup> J = torque that wrench will withstand in inch-pounds. Values updated from ANSI/ASME B107.100-2010, Wrenches.

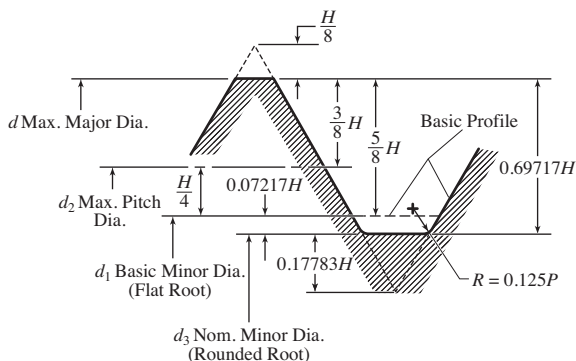


Fig. 3. External Thread Design M Profile with No Allowance (Fundamental Deviation) (Flanks at Maximum Material Condition). For Dimensions see Table 3

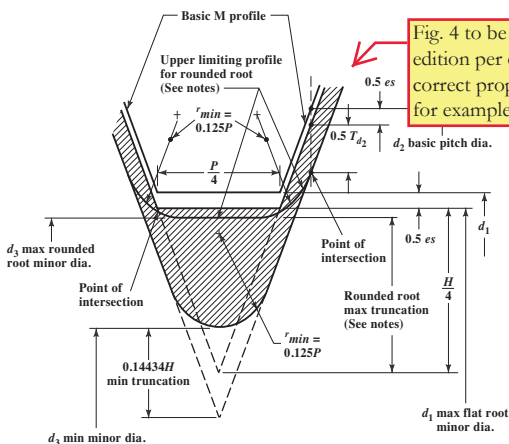


Fig. 4. M Profile, External Thread Root, Upper and Lower Limiting Profiles for  $r_{min} = 0.125 P$  and for Flat Root (Shown for Tolerance Position g)

Notes:

- 1) "Section lined" portions identify tolerance zone and unshaded portions identify allowance (fundamental deviation).
- 2) The upper limiting profile for rounded root is not a design profile; rather it indicates the limiting acceptable condition for the rounded root which will pass a GO thread gage.
- 3) Max truncation =  $\frac{H}{4} - r_{min} \left( 1 - \cos \left[ 60^\circ - \arccos \left( 1 - \frac{T_{d2}}{4r_{min}} \right) \right] \right)$

where  $H$  = Height of fundamental triangle


$r_{min}$  = Minimum external thread root radius

$T_{d2}$  = Tolerance on pitch diameter of external thread

The below showing the revised proportion of p. 2018, Fig. 4, for future adjustment of this figure, per the ASME standard, is shown below.

METRIC SCREW THREADS: M PROFILE

ASME B1.13M-2005

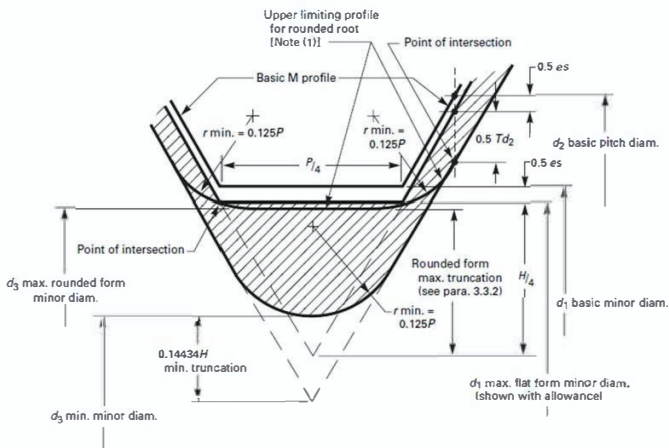

GENERAL NOTE: Section lined portions identify tolerance zone and unshaded portions identify allowance (fundamental deviation).

NOTE:

(1) The upper limiting profile for rounded root form allows no tolerance for flank wear of a tool producing it and is therefore not to be used as a design profile. Rather, it is an indication of the limiting acceptable condition for the rounded root form which will pass a GO thread gage.

Fig. 5 M Profile, External Thread Root, Upper and Lower Limiting Profiles for  $r \min. = 0.125P$  and for Flat Root Form (Shown for Tolerance Position g)

The above material from ASME B1.13M-2005 is reproduced here, courtesy of ASME, for illustration purposes regarding this page change only. ©ASME. All rights reserved.

**Internal Threads:**

*Min major dia.* = basic major dia. +  $EI$  (Table 6)

*Min pitch dia.* = basic major dia.  $- 0.6495191P$  (Table 3) +  $EI$  for  $D_2$  (Table 6)

*Max pitch dia.* = min pitch dia. +  $TD_2$  (Table 10)

*Max major dia.* = max pitch dia. +  $0.7938566P$  (Table 3)

*Min minor dia.* = min major dia.  $- 1.0825318P$  (Table 3)

*Max minor dia.* = min minor dia. +  $TD_1$  (Table 8)

**External Threads:**

*Max major dia.* = basic major dia.  $- es$  (Table 6) (Note that  $es$  is an absolute value.)

*Min major dia.* = max major dia.  $- Td$  (Table 9)

*Max pitch dia.* = basic major dia.  $- 0.6495191P$  (Table 3)  $- es$  for  $d_2$  (Table 6)

*Min pitch dia.* = max pitch dia.  $- Td_2$  (Table 11)

*Max flat form minor dia.* = max pitch dia.  $- 0.433013P$  (Table 3)

*Max rounded root minor dia.* = max pitch dia.  $- 2 \times \text{max trunc.}$  (See Fig. 4)

*Min rounded root minor dia.* = min pitch dia.  $- 0.616025P$  (Table 3)

*Min root radius* =  $0.125P$

**Table 8. ANSI Standard Minor Diameter Metric Threads  $TD_1$**  ISO 965/1 A

| Pitch<br>$P$ | 4     | 5     | 6     | 7     | 8     | 9     |
|--------------|-------|-------|-------|-------|-------|-------|
| 0.2          | 0.038 | ...   | ...   | ...   | ...   | ...   |
| 0.25         | 0.045 | 0.056 | 0.067 | 0.085 | ...   | ...   |
| 0.3          | 0.053 | 0.067 | 0.080 | 0.100 | ...   | ...   |
| 0.35         | 0.063 | 0.080 | 0.090 | 0.112 | ...   | ...   |
| 0.4          | 0.071 | 0.090 | 0.100 | 0.125 | ...   | ...   |
| 0.45         | 0.080 | 0.100 | 0.112 | 0.140 | 0.180 | ...   |
| 0.5          | 0.090 | 0.112 | 0.125 | 0.160 | 0.200 | ...   |
| 0.6          | 0.100 | 0.125 | 0.140 | 0.180 | 0.224 | ...   |
| 0.7          | 0.112 | 0.140 | 0.150 | 0.190 | 0.236 | ...   |
| 0.75         | 0.118 | 0.150 | 0.160 | 0.200 | 0.250 | 0.315 |
| 0.8          | 0.125 | 0.160 | 0.190 | 0.236 | 0.300 | 0.375 |
| 1            | 0.150 | 0.190 | 0.212 | 0.265 | 0.335 | 0.425 |
| 1.25         | 0.170 | 0.212 | 0.236 | 0.300 | 0.375 | 0.475 |
| 1.5          | 0.190 | 0.236 | 0.265 | 0.335 | 0.425 | 0.530 |
| 1.75         | 0.212 | 0.265 | 0.300 | 0.375 | 0.475 | 0.600 |
| 2            | 0.236 | 0.300 | 0.355 | 0.450 | 0.560 | 0.710 |
| 2.5          | 0.280 | 0.355 | 0.400 | 0.500 | 0.630 | 0.800 |
| 3            | 0.315 | 0.400 | 0.450 | 0.560 | 0.710 | 0.900 |
| 3.5          | 0.355 | 0.450 | 0.500 | 0.600 | 0.750 | 0.950 |
| 4            | 0.375 | 0.475 | 0.530 | 0.670 | 0.850 | 1.060 |
| 4.5          | 0.425 | 0.530 | 0.560 | 0.710 | 0.900 | 1.120 |
| 5            | 0.450 | 0.560 | 0.600 | 0.750 | 0.950 | 1.180 |
| 5.5          | 0.475 | 0.600 | 0.630 | 0.800 | 1.000 | 1.250 |
| 6            | 0.500 | 0.630 | 0.800 | 1.000 | 1.250 | 1.600 |
| 8            | 0.630 | 0.800 | 1.000 | 1.250 | 1.600 | ...   |

Equation identified as incorrect in older ANSI standard; not in new standard. Correct to read:

*Max rounded root minor dia.* = max pitch dia.  $- H + 2 \times \text{max trunc.}$  (see Fig. 4)

<sup>a</sup> Tabulated in this standard for M internal threads.  
All dimensions are in millimeters.

Corrected 1.0700 (previously was incorrectly 0.0700)

CENTRALIZING ACME SCREW THREADS

2067

Table 8b. Limiting Dimensions of American National Standard Centralizing Acme Single-Start Screw Threads, Classes 2C, 3C, and 4C/ANSI/ASME B1.5-1997 (R2014)

| Nominal Diameter, <i>D</i><br>Threads per Inch <sup>a</sup> |     | 1/2    | %       | 3/4    | 1      | 1 1/4  | 1 1/2  | 1 3/4  | 1 5/8  | 1 7/8  | 2      |
|-------------------------------------------------------------|-----|--------|---------|--------|--------|--------|--------|--------|--------|--------|--------|
| Limiting Dimensions                                         |     | 10     | 8       | 6      | 6      | 5      | 5      | 5      | 4      | 4      | 4      |
| External Threads                                            |     |        |         |        |        |        |        |        |        |        |        |
| Classes 2C, 3C, and 4C, Major Diameter                      | Max | 0.5000 | 0.6250  | 0.7500 | 0.8750 | 1.0000 | 1.1250 | 1.2500 | 1.3750 | 1.5000 |        |
| Class 2C, Major Diameter                                    | Min | 0.4975 | 0.6222  | 0.7470 | 0.8717 | 0.9965 | 1.1213 | 1.2461 | 1.3709 | 1.4957 |        |
| Class 3C, Major Diameter                                    | Min | 0.4989 | 0.6238  | 0.7487 | 0.8736 | 0.9985 | 1.1234 | 1.2483 | 1.3732 | 1.4982 |        |
| Class 4C, Major Diameter                                    | Min | 0.4993 | 0.6242  | 0.7491 | 0.8741 | 0.9990 | 1.1239 | 1.2489 | 1.3738 | 1.4988 |        |
| Classes 2C, 3C, and 4C, Minor Diameter                      | Max | 0.3800 | 0.4800  | 0.5633 | 0.6883 | 0.7800 | 0.9050 | 1.0300 | 1.1050 | 1.2300 |        |
| Class 2C, Minor Diameter                                    | Min | 0.3594 | 0.4570  | 0.5371 | 0.6615 | 0.7509 | 0.8753 | 0.9998 | 1.0719 | 1.1965 |        |
| Class 3C, Minor Diameter                                    | Min | 0.3704 | 0.4693  | 0.5511 | 0.6758 | 0.7664 | 0.8912 | 1.0159 | 1.0896 | 1.2144 |        |
| Class 4C, Minor Diameter                                    | Min | 0.3731 | 0.4723  | 0.5546 | 0.6794 | 0.7703 | 0.8951 | 1.0199 | 1.0940 | 1.2188 |        |
| Class 2C, Pitch Diameter                                    | {   | Max    | 0.4443  | 0.5562 | 0.6598 | 0.7842 | 0.8920 | 1.0165 | 1.1411 | 1.2406 | 1.3652 |
|                                                             | {   | Min    | 0.4306  | 0.5408 | 0.6424 | 0.7663 | 0.8726 | 0.9967 | 1.1210 | 1.2186 | 1.3429 |
| Class 3C, Pitch Diameter                                    | {   | Max    | 0.4458  | 0.5578 | 0.6615 | 0.7861 | 0.8940 | 1.0186 | 1.1433 | 1.2430 | 1.3677 |
|                                                             | {   | Min    | 0.4394  | 0.5506 | 0.6534 | 0.7778 | 0.8849 | 1.0094 | 1.1339 | 1.2327 | 1.3573 |
| Class 4C, Pitch Diameter                                    | {   | Max    | 0.4472  | 0.5593 | 0.6632 | 0.7880 | 0.8960 | 1.0208 | 1.1455 | 1.2453 | 1.3701 |
|                                                             | {   | Min    | 0.4426  | 0.5542 | 0.6574 | 0.7820 | 0.8895 | 1.0142 | 1.1388 | 1.2380 | 1.3627 |
| Internal Threads                                            |     |        |         |        |        |        |        |        |        |        |        |
| Classes 2C, 3C, and 4C, Major Diameter                      | Min | 0.5007 | 0.6258  | 0.7509 | 0.8759 | 1.0010 | 1.1261 | 1.2511 | 1.3762 | 1.5012 |        |
| Classes 2C and 3C, Major Diameter                           | Max | 0.5032 | 0.6286  | 0.7539 | 0.8792 | 1.0045 | 1.1298 | 1.2550 | 1.3803 | 1.5055 |        |
| Class 4C, Major Diameter                                    | Min | 0.5021 | 0.6274  | 0.7526 | 0.8778 | 1.0030 | 0.1282 | 1.2533 | 1.3785 | 1.5036 |        |
| Classes 2C, 3C, and 4C, Minor Diameter                      | {   | Max    | 0.4100  | 0.5125 | 0.6000 | 0.7250 | 0.8200 | 0.9450 | 1.0800 | 1.2750 |        |
|                                                             | {   | Min    | 0.04150 | 0.5187 | 0.6083 | 0.7333 | 0.8300 | 0.9550 | 1.0800 | 1.1625 | 1.2875 |
| Class 2C, Pitch Diameter                                    | {   | Max    | 0.4500  | 0.5625 | 0.6667 | 0.7917 | 0.9000 | 1.0250 | 1.1500 | 1.2500 | 1.3750 |
|                                                             | {   | Min    | 0.4637  | 0.5779 | 0.6841 | 0.8096 | 0.9194 | 1.0448 | 1.1701 | 1.2720 | 1.3750 |
| Class 3C, Pitch Diameter                                    | {   | Max    | 0.4500  | 0.5625 | 0.6667 | 0.7917 | 0.9000 | 1.0250 | 1.1500 | 1.2500 | 1.3750 |
|                                                             | {   | Min    | 0.4564  | 0.5697 | 0.6748 | 0.8000 | 0.9091 | 1.0342 | 1.1594 | 1.2603 | 1.3854 |
| Class 4C, Pitch Diameter                                    | {   | Max    | 0.4500  | 0.5625 | 0.6667 | 0.7917 | 0.9000 | 1.0250 | 1.1500 | 1.2500 | 1.3750 |
|                                                             | {   | Min    | 0.4546  | 0.5676 | 0.6725 | 0.7977 | 0.9065 | 1.0316 | 1.1567 | 1.2573 | 1.3824 |

Table 2. Keyway Dimensions and Tolerances for Metric Square and Rectangular Parallel Keys ANSI/ASME B18.25.1M-1996 (Withdrawn)

| Key size<br>$b \times h$<br>(mm) | Keyway                                                 |        |         |         |               |        |        |        |          |        |              |           |            |           |
|----------------------------------|--------------------------------------------------------|--------|---------|---------|---------------|--------|--------|--------|----------|--------|--------------|-----------|------------|-----------|
|                                  | Width.                                                 |        |         |         |               |        |        |        |          |        |              |           |            |           |
|                                  | Tolerance <sup>a</sup> and Resulting Fits <sup>b</sup> |        |         |         |               |        |        |        |          |        |              |           |            |           |
|                                  | Normal Fit                                             |        |         |         | Close Fit     |        |        |        | Free Fit |        |              |           | Depth      |           |
|                                  | Shaft                                                  |        | Hub     |         | Shaft and Hub |        | Shaft  |        | Hub      |        | Shaft, $t_1$ |           | Hub, $t_2$ |           |
| Basic Size <sup>c</sup>          | N9                                                     | Fit    | JS9     | Fit     | P9            | Fit    | H9     | Fit    | D10      | Fit    | Basic Size   | Tolerance | Basic Size | Tolerance |
| 2 × 2                            | -0.004                                                 | 0.010L | +0.0125 | 0.0265L | -0.006        | 0.008L | +0.025 | 0.039L | +0.060   | 0.074L | 1.2          |           | 1          |           |
| 3 × 3                            | -0.029                                                 | 0.029T | -0.0125 | 0.0125T | -0.031        | 0.031T | 0      | 0T     | +0.020   | 0.020L | 1.8          |           | 1.4        |           |
| 4 × 4                            |                                                        |        |         |         |               |        |        |        |          |        | 2.5          |           | 1.8        |           |
| 5 × 3                            | 0                                                      | 0.018L | +0.0150 | 0.033L  | -0.012        | 0.006L | +0.030 | 0.048L | +0.078   | 0.096L | 1.8          | +0.1      | 1.4        | +0.1      |
| 5 × 5                            | -0.030                                                 | 0.030T | -0.0150 | 0.015T  | -0.042        | 0.042T | 0      | 0T     | +0.030   | 0.030L | 3            | 0         | 2.8        | 0         |
| 6 × 4                            |                                                        |        |         |         |               |        |        |        |          |        | 2.5          |           | 1.8        |           |
| 6 × 6                            |                                                        |        |         |         |               |        |        |        |          |        | 3.5          |           | 2.8        |           |
| 8 × 5                            |                                                        |        |         |         |               |        |        |        |          |        | 3            |           | 2.8        |           |
| 8 × 7                            | 0                                                      | 0.022L | +0.0180 | 0.040L  | -0.015        | 0.007L | +0.036 | 0.058L | +0.098   | 0.120L | 4            | +0.2      | 3.3        | +0.1      |
| 10 × 6                           | -0.036                                                 | 0.036T | -0.0180 | 0.018T  | -0.051        | 0.051T | 0      | 0T     | +0.040   | 0.040L | 3.5          | 0         | 2.8        | 0         |
| 10 × 8                           |                                                        |        |         |         |               |        |        |        |          |        | 5            |           | 3.3        |           |
|                                  |                                                        |        |         |         |               |        |        |        |          |        |              | +0.2      |            | +0.2      |
|                                  |                                                        |        |         |         |               |        |        |        |          |        |              | 0         |            | 0         |
|                                  |                                                        |        |         |         |               |        |        |        |          |        |              | +0.1      |            | +0.1      |
| 12 × 6                           |                                                        |        |         |         |               |        |        |        |          |        | 3.5          |           | 2.8        |           |
| 12 × 8                           |                                                        |        |         |         |               |        |        |        |          |        |              | +0.2      | 3.3        | +0.2      |
|                                  |                                                        |        |         |         |               |        |        |        |          |        |              | 0         |            |           |
| 14 × 6                           | 0                                                      | 0.027L | +0.0215 | 0.0485L | -0.018        | 0.009L | +0.043 | 0.070L | +0.120   | 0.147L | 3.5          | +0.1      | 2.8        | +0.1      |
| 14 × 9                           | -0.043                                                 | 0.043T | -0.0215 | 0.0215T | -0.061        | 0.061T | 0      | 0T     | +0.050   | 0.050L |              | 0         |            | 0         |
| 16 × 7                           |                                                        |        |         |         |               |        |        |        |          |        | 5.5          |           | 3.8        |           |
| 16 × 10                          |                                                        |        |         |         |               |        |        |        |          |        | 4            | +0.2      | 4.3        | +0.2      |
| 18 × 7                           |                                                        |        |         |         |               |        |        |        |          |        | 6            | 0         | 3.3        | 0         |
| 18 × 11                          |                                                        |        |         |         |               |        |        |        |          |        | 7            |           | 4.4        |           |

Footnote c marker added. (Footnote on next page.)

0.6 corrected (was 0.06); also  
footnote c marker added

# METRIC KEYS AND KEYWAYS

2543

**Table 2. (Continued) Keyway Dimensions and Tolerances for Metric Square and Rectangular Parallel Keys ANSI/ASME B18.25.1M-1996 (Withdrawn)**

| Key size<br>$b \times h$<br>(mm) | Width.                                                 |        |        |         |         |               |         |        |        |        | Keyway   |        |                  |                |            |                |      |                  |  |
|----------------------------------|--------------------------------------------------------|--------|--------|---------|---------|---------------|---------|--------|--------|--------|----------|--------|------------------|----------------|------------|----------------|------|------------------|--|
|                                  | Tolerance <sup>a</sup> and Resulting Fits <sup>b</sup> |        |        |         |         |               |         |        |        |        | Depth    |        |                  |                |            |                |      |                  |  |
|                                  | Normal Fit                                             |        |        |         |         | Close Fit     |         |        |        |        | Free Fit |        |                  | Shaft, $t_1$   |            | Hub, $t_2$     |      | Radius, $r$      |  |
|                                  | Shaft                                                  |        | Hub    |         | Fit     | Shaft and Hub |         | Fit    | H9     | Shaft  | Hub      |        | Basic Size       | Toler-<br>ance | Basic Size | Toler-<br>ance | Min. | Max.             |  |
|                                  | N9                                                     | Fit    | JS9    | Fit     |         | P9            | Fit     |        |        |        | D10      | Fit    |                  |                |            |                |      |                  |  |
|                                  | Basic Size <sup>c</sup>                                | 20     |        |         |         |               |         |        |        |        |          |        |                  | 5              | 3.3        |                |      |                  |  |
| 20 × 8                           | 20                                                     |        |        |         |         |               |         |        |        |        |          |        | 7.5              | 4.9            |            |                |      |                  |  |
| 20 × 12                          | 20                                                     |        |        |         |         |               |         |        |        |        |          |        | 5.5              | 3.8            |            |                |      |                  |  |
| 22 × 9                           | 22                                                     |        |        |         |         |               |         |        |        |        |          |        | 9                | 5.4            |            |                |      |                  |  |
| 22 × 14                          | 22                                                     | 0      | 0.033L | +0.026  | 0.059L  | -0.022        | 0.011L  | 0.085L | +0.052 | 0.085L | +0.149   | 0.182L | 5.5              | 3.8            |            |                |      |                  |  |
| 25 × 9                           | 25                                                     | -0.052 | 0.052T | -0.026  | 0.026T  | -0.074        | 0.074T  | 0      | 0      | 0T     | +0.065   | 0.065L | 9                | 5.4            |            |                |      |                  |  |
| 25 × 14                          | 25                                                     |        |        |         |         |               |         |        |        |        |          |        | 6                | 4.3            |            |                | 0.4  | 0.6 <sup>c</sup> |  |
| 28 × 10                          | 28                                                     |        |        |         |         |               |         |        |        |        |          |        | 10               | 6.4            |            |                |      |                  |  |
| 28 × 16                          | 28                                                     |        |        |         |         |               |         |        |        |        |          |        | 7 <sup>c</sup>   | 4.4            |            |                |      |                  |  |
| 32 × 11                          | 32                                                     |        |        |         |         |               |         |        |        |        |          |        | 11 <sup>c</sup>  | 7.4            |            |                |      |                  |  |
| 32 × 18                          | 32                                                     |        |        |         |         |               |         |        |        |        |          |        | 7.5 <sup>c</sup> | 4.9            |            |                |      |                  |  |
| 36 × 12                          | 36                                                     |        |        |         |         |               |         |        |        |        |          |        | 12               | 8.4            |            |                |      |                  |  |
| 36 × 20                          | 36                                                     | 0      | 0.039L | +0.031  | 0.070L  | -0.026        | 0.013L  | 0.101L | +0.062 | 0.101L | +0.180   | 0.219L | 13               | 9.4            |            |                | 0.7  | 1.0              |  |
| 40 × 22                          | 40                                                     | -0.062 | 0.062T | -0.031  | 0.031T  | -0.088        | 0.088T  | 0      | 0      | 0T     | +0.080   | 0.080L | 15               | 10.4           |            |                |      |                  |  |
| 45 × 25                          | 45                                                     |        |        |         |         |               |         |        |        |        |          |        | 17               | 11.4           |            |                |      |                  |  |
| 45 × 25                          | 45                                                     |        |        |         |         |               |         |        |        |        |          |        | 20               | +0.3           |            |                |      |                  |  |
| 56 × 32                          | 56                                                     |        |        |         |         |               |         |        |        |        |          |        | 20               | 12.4           |            |                | 1.2  | 1.6              |  |
| 63 × 32                          | 63                                                     | 0      | 0.046L | +0.037  | 0.083L  | -0.032        | 0.014L  | 0.120L | +0.074 | 0.120L | +0.220   | 0.266L | 22               | 14.4           |            |                |      |                  |  |
| 70 × 36                          | 70                                                     | -0.074 | 0.074T | -0.037  | 0.037T  | -0.106        | 0.106T  | 0      | 0      | 0T     | +0.100   | 0.100L | 25               | 15.4           |            |                |      |                  |  |
| 80 × 40                          | 80                                                     |        |        |         |         |               |         |        |        |        |          |        | 28               | 17.4           |            |                | 2.0  | 2.5              |  |
| 90 × 45                          | 90                                                     | 0      | 0.054L | +0.0435 | 0.0975L | -0.037        | 0.017L  | 0.139L | +0.087 | 0.139L | +0.260   | 0.314L | 31               | 19.5           |            |                |      |                  |  |
| 100 × 50                         | 100                                                    | -0.087 | 0.87T  | -0.0435 | 0.0435T | -0.1254       | 0.1254T | 0      | 0      | 0T     | +0.120   | 0.120L | 38               |                |            |                |      |                  |  |

<sup>a</sup> Some of the tolerances are expressed as plus-minus. See *Tolerances* on page 2539 for more information.

<sup>b</sup> Resulting fits: L indicates a clearance between the key and keyway; T indicates an interference between the key and keyway.

<sup>c</sup> Values changed for accuracy from that given in ANSI/ASME B18.25.1M-1996 (Withdrawn).

Footnote  
c marker  
added.

Footnote c revised.

**Table 5. Units Outside SI, Accepted for Use with SI**

| Name                     | Symbol  | Value in SI Units                                         |
|--------------------------|---------|-----------------------------------------------------------|
| minute                   | min     | 1 min = 60 s                                              |
| hour                     | h       | 1 h = 60 min = 3600 s                                     |
| day                      | d       | 1 d = 24 h = 1440 min = 86400 s                           |
| liter                    | L       | 1 L = 1 dm <sup>3</sup> = 10 <sup>-3</sup> m <sup>3</sup> |
| metric ton               | t       | 1 t = 10 <sup>3</sup> kg = 2205 lb                        |
| bel                      | B       | 1 B = 10 dB                                               |
| degree (angle)           | °       | 1° = $\pi/180$ rad                                        |
| minute (angle)           | '       | 1' = (1/60)° = ( $\pi/10800$ ) rad                        |
| second (angle)           | "       | 1" = (1/60)' = ( $\pi/6480000$ ) rad                      |
| electron volt            | eV      | 1 eV = 1.60218 × 10 <sup>-19</sup> J                      |
| unified atomic mass unit | Da or u | 1 u = 1.66054 × 10 <sup>-27</sup> kg                      |
| astronomical unit        | au      | 1 au = 1.49598 × 10 <sup>11</sup> m                       |
| nautical mile            | nmi     | 1 nmi = 1852 m                                            |
| knot                     | kn      | 1 kn = 1 nmi·h <sup>-1</sup> = 0.514444 m·s <sup>-1</sup> |
| are                      | a       | 1 a = 100 m <sup>2</sup>                                  |
| hectare                  | ha      | 1 ha = 100 a = 10 <sup>4</sup> m <sup>2</sup>             |
| bar                      | bar     | 1 bar = 10 <sup>5</sup> kPa = 10 <sup>5</sup> Pa          |
| ångström                 | Å       | 1 Å = 0.1 nm = 10 <sup>-10</sup> m                        |
| curie                    | Ci      | 1 Ci = 3.7 × 10 <sup>10</sup> Bq                          |
| roentgen                 | R       | 1 R = 2.58 × 10 <sup>-4</sup> C·kg <sup>-1</sup>          |
| rad                      | rad     | 1 rad = 10 <sup>-2</sup> Gy                               |
| rem                      | rem     | 1 rem = 10 <sup>-2</sup> Sv                               |

Dot/  
decimal  
placement  
corrected in  
2.58 in  
roentgen  
equation.

**Table 6. SI Prefixes**

| Factor           | Name  | Symbol | Factor            | Name  | Symbol |
|------------------|-------|--------|-------------------|-------|--------|
| 10 <sup>1</sup>  | deca  | da     | 10 <sup>-1</sup>  | deci  | d      |
| 10 <sup>2</sup>  | hecto | h      | 10 <sup>-2</sup>  | centi | c      |
| 10 <sup>3</sup>  | kilo  | k      | 10 <sup>-3</sup>  | milli | m      |
| 10 <sup>6</sup>  | mega  | M      | 10 <sup>-6</sup>  | micro | μ      |
| 10 <sup>9</sup>  | giga  | G      | 10 <sup>-9</sup>  | nano  | n      |
| 10 <sup>12</sup> | tera  | T      | 10 <sup>-12</sup> | pico  | p      |
| 10 <sup>15</sup> | peta  | P      | 10 <sup>-15</sup> | femto | f      |
| 10 <sup>18</sup> | exa   | E      | 10 <sup>-18</sup> | atto  | a      |

### Standard of Length and the US Customary Unit System

Among all units of measure, the history of standard of length traces a clear path from the less scientific approach of physical object standards used in past centuries to the today's precise standards, based on physical constants on an atomic level.

The primary Imperial yard was set by the British Weights and Measures Act of 1824. But it was partially destroyed in a fire in 1834, and replaced by a new standard, made of an alloy of copper, tin, and zinc. Between 1845 and 1855, forty copies of the Imperial yard were cast. Bronze yard No. 11 went to the United States, an exact copy of the British Imperial yard, in both form and material.

By an Act of Congress, in 1866, the US legally recognized the meter as a standard of length equal to 39/39.37 = 0.9144 yard; for commercial purposes, 1 meter = 39.37 inches.